## Automatic Air Vent

## **Feature**

Brass body MNPT (ASME B1.20.1 - NPT) 150 CWP

Working conditions:

Water: from 32°F to 230°F


over 212°F only for water with added anti-boiling fluids



## Material

|    | Part           | Material                   | Specification    |  |
|----|----------------|----------------------------|------------------|--|
| 1  | Body           | Brass                      | ASTM B283 C37700 |  |
| 2  | Floating       | Polypropylene <sup>1</sup> | -                |  |
| 3  | Cursor         | Plastic                    | -                |  |
| 4  | Spring         | Stainless Steel            | AISI 304         |  |
| 5  | Shutter        | Plastic                    | -                |  |
| 6  | Shutter gasket | EPDM Perox                 | -                |  |
| 7  | Vent           | Brass                      | ASTM B283 C37700 |  |
| 8  | Cursor mount   | Stainless Steel            | -                |  |
| 9  | O-ring         | EPDM Perox                 | -                |  |
| 10 | Тар            | Brass                      | ASTM B283 C37700 |  |
| 11 | Vent cap       | Polypropylene <sup>1</sup> | -                |  |

<sup>&</sup>lt;sup>1</sup> For high temperature

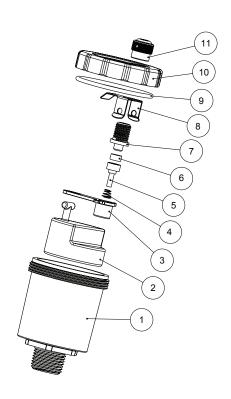

## Dimension, Weight

| Size | N            | Α    | D    | Н    | Weight |
|------|--------------|------|------|------|--------|
|      |              | [in] | [in] | [in] | [lb]   |
| 1/4" | 1⁄4 - 18 NPT | 1.82 | 0.47 | 2.83 | 0.34   |
| 3/8" | % - 18 NPT   | 1.82 | 0.47 | 2.83 | 0.34   |
| 1/2" | ½ - 14 NPT   | 1.82 | 0.61 | 2.97 | 0.34   |

