


STAINLESS STEEL BALL VALVES

SPECIFICATIONS

- Investment casting body
- Working pressure 1000PSI for W.O.G
- Adjustable stem packing
- Pure teflon seals and seats
- Temperature range -60 to 450 °F
- 100% leakage tested at 100 PSI air under water
- Hydrostatic test pressure 1500 PSI
- Locking Device
- Materials CF8M(SS316)

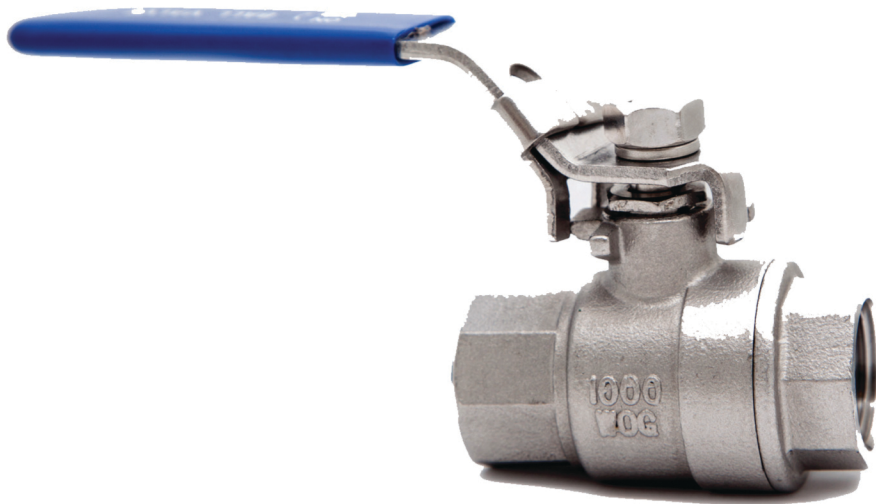

CHARMAN
MANUFACTURING