


## Wilkerson FRLs

### M28-Series Standard Coalescing Filters


#### Features

- Removes extremely fine oil mists, oil aerosols, and microscopic particles
- A standard airline filter should be installed as a pre-filter when using a coalescing filter 
- 0.5 micron type B and 0.003 micron type D elements are optional
- Differential pressure indicator changes from green to red with pressure loss
- High-efficiency removal of water, oil aerosols, and solid particulate contaminants down to 0.01 mg/m<sup>3</sup> with minimum pressure drop
- Modern design and appearance
- Light weight
- High flow capacity
- 2.87 oz. bowl

#### Specifications

- Maximum operating conditions: 150 PSIG (10.3 bar) and -13°F to 125°F (-25°C to 52°C)

Size	Flow (SCFM)	Compact Transparent Bowl and Guard	
		Automatic Drain Part #	Manual Drain Part #
3/8"	42	M28-03A	M28-03M
1/2"	42	M28-04A	M28-04M
3/4"	42	M28-06A	M28-06M

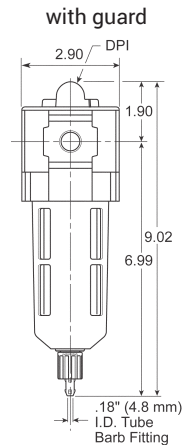

### M30-Series Jumbo Coalescing Filters


#### Features

- 0.01 micron type C element
- 2 oz. bowl

#### Specifications

- Maximum operating conditions: 150 PSIG (10.3 bar) and 32°F to 125°F (0°C to 52°C)

Size	Flow (SCFM)	Jumbo Transparent Bowl and Guard	
		Automatic Drain Part #	
1/2"	123	M30-04A	
3/4"	173	M30-06A	
1"	203	M30-08A	



NOTE: SCFM ratings at 150 PSIG inlet pressure.

See pages 322-326 for accessories.

FRLs are designed for air service only, unless otherwise indicated. 