


### Unloader Valves

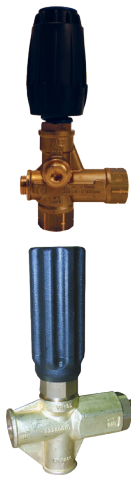

**Features**

- Automatically relieves pressure from the pump at shut-off
- Inlet: (2) each, 3/8" female NPT
- Outlet: 3/8" female NPT
- Bypass: (2) each, 3/8" female NPT

**Specification**

- Maximum temperature: 194°F (90°C)

Description	Maximum Flow (GPM)	Working PSI	Part #
yellow spring	10.5	2,320	AL605
blue spring	10.5	3,650	AL606
black spring	10.5	4,500	AL607

**Features**

- Inlet: 3/8" female
- Outlet: 3/8" male
- Bypass: 3/8" female

**Specification**

- Maximum temperature: 190°F (88°C)

Description	Flow (GPM)	Working PSI	Part #
VR-35 unloader valve	8	5,100	AR20831

### Thermal Relief Valve



**Feature**

- Inlet: 1/2" male

**Specifications**

- Operating PSI: 200 PSI
- Maximum temperature: 140°F (60°C)

Brass  
Part #  
TPP140

### Safety Release Valve



**Feature**

- Inlet: 3/8" male

**Specifications**

- Pressure range: 1,000 to 4,000 PSI
- Maximum temperature: 140°F (60°C)
- 5 GPM flow rate

Part #  
AR5000-1

### Pressure Washer Valve

New



**Features**

- 304 stainless steel wedge handle provides ease of operation
- Quick water shut off allows for easy changing of pressure wash guns

**Specifications**

- Maximum operating PSI: 5,500 PSI
- Maximum temperature: 212°F (100°C)

Female Size	Length	Flow (GPM)	Seal	304 Stainless Steel Part #
3/8"-18 NPT	2.933"	12	FKM	PWV38

### Pressure Washer Braided Hose



**Specification**

- Maximum temperature: 250°F (121°C)

I.D.	Male Swivel Inlet	Male Swivel Outlet	Pressure Rating (PSI)	Length	Rubber Part #
3/8"	3/8"	3/8"	4,000	50'	AR503830SSP

### Hand Crank Hose Reel



**Features**

- 3/8" outlet, 3/8" inlet
- Includes jumper hose, mounting bracket and crank handle
- Holds 100' of 3/8" pressure hose

**Specifications**

- Working PSI: 3,000 PSI
- Maximum temperature: 160°F (71°C)

Steel  
Part #

AR-REEL100