



GFNT2-W

20 Amp, Self Test, Non Tamper-Resistant Slim GFCI Outlet with LED Indicator Light

20 Amp, 125 Volt Receptacle/Outlet, 20 Amp Feed-Through, Self-test SmartlockPro Slim GFCI, monochromatic, Residential /Commercial applications, back and side wired, heavy duty, wallplate/faceplate and self grounding clip included - White

- SAFE – Delivers continuous ground fault protection
- SELF TESTING – Automatically self-tests to ensure it can respond to ground fault
- SIMPLE – Status indicator light provides simple, intuitive feedback
- COMPATIBLE – Device designed to improve immunity for reduced HF nuisance tripping


Color :  White

UPC Code : 078477712764

Country Of Origin : China

NEMA :  5-20R

Available Colors :

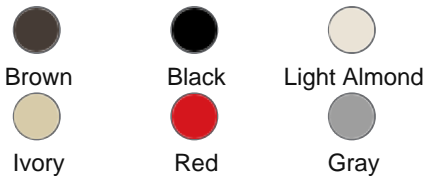

Technical Information

Electrical Specifications

Amperage : 20 A
Dielectric Voltage : 1250 VAC
Grounding : Self-Grounding
Horsepower Rating : 1 hp
Pole(s) : 2
Power Supply Input and Frequency : 125V, 60Hz
Short Circuit Current Rating : 10 kA
Temperature Rise : Max 30°C
Trip Level : Class A
Voltage : 125 VAC
Wire(s) : 3

Environmental Specifications

Operating Temperature :
 Maximum Continuous 66°C,
 Minimum -35°C (w/o impact)

Material Specifications

Body : Thermoplastic
Face : Thermoplastic
Grounding Screw : #8 Galvanized Steel
Line Contacts : Brass
Mounting Strap : Galvanized Steel
Self-Grounding Clip : Yes
TR Shutter : Non-Tamper
Terminal Clamps : Brass
Terminal Screws : #8 Plated Steel

Mechanical Specifications

Product ID : Ratings are marked on device
Termination : Back and Side Wire
Torque Range : 14-18 lbs.
Wire Accomodation : #10 - #14 AWG Copper, #10 - #12 Copper Clad

Product Features

Brand : SmartlockPro

Color : White

Device Type : Duplex
Receptacle/Outlet

Feature(s) : Indicator Light,
Self-Test

Grade : Residential
/Commercial Specification
Grade

NEMA Configuration : 5-20R

Product Type : GFCI

Warranty

Warranty : 2-Year Limited

Standards and Certifications

**Applicable Standards and
Certifications :** UL|CSA|CSA
C22.2 No. 144|CSA C22.2 No.
42|Fed Spec WC-596|UL
943|UL 498

NEMA : WD-1 and WD-6

Features and Benefits

- Provides continuous ground fault protection – detects and trips on actual ground fault even when self-test is being conducted
- On initial power up, tests the GFCI within 3 seconds
- Auto-monitoring exceeds the UL requirement
- Auto adapts and shifts to more frequent testing if potential problem is detected
- Status Indicator Light provides simple, intuitive feedback on power and protection status as well as indication of line/load reversal
- Patented Lockout Action prevents reset if GFCI is damaged and cannot respond to a ground fault
- Electronics are designed to minimize any false triggers
- Reduced depth makes it easier to install in any electrical box, even shallow ones
- Terminals allow for easy wiring options – back and side wire capable
- External back wire clamps provide visual indication of proper wire seating
- Withstands high torque and resists wire pullout
- Standard brass self-grounding clip
- Trip threshold meets or exceeds UL requirements for tripping time
- Improved immunity to high-frequency noise reduces nuisance tripping
- Advanced electronics design provides superior resistance to electrical surges and over-voltages
- Compatible with all Decora devices and wallplates; available in select Decora colors
- UL Fed Spec WC-596 rated

Patents *

CA2730014

MX308495

US10483066

MX302458

MX344697

US11456138

US7697252

US8587914

US8599522


US8944859

US9053886

US9276393

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

Dimensional Drawing

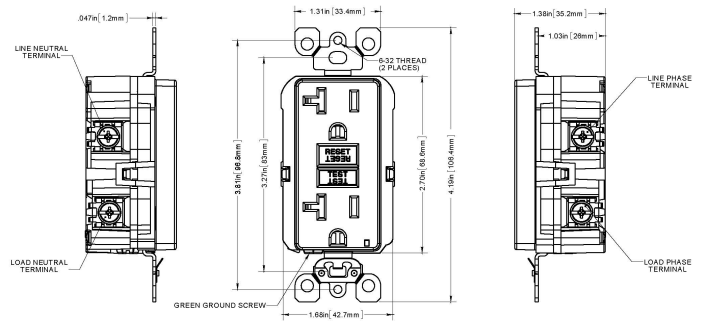

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.