

HearthMaster™ Log Lighter Kit



PF-941-L2 LP Gas (Propane) Log Lighter Bar

ITEM # SUBMITTED: _____
JOB NAME: _____
LOCATION: _____
ENGINEER: _____
CONTRACTOR: _____
PO #: _____
TAG: _____

APPLICATION

The HearthMaster™ PF-941-L2 Log Lighter Bar is a convenient way to achieve a crackling wood fire quick and easy. This bar is for with LP (Propane) Gas applications **ONLY** (use *HearthMaster™ PF-940-10 for Natural Gas Applications*).

INSTALLATION

Product installation and system testing shall be in accordance with NFPA 54/ANSI Z223.1 (National Fuel Gas Code), state/local codes and the manufacturer's instructions. A HearthMaster™ Keyed Valve (PF-952 or PF-954 series must be installed upstream (within 6 feet) of the log lighter.



MATERIALS

Mixing Chamber: Malleable Iron with 2 inlet ports (A & B in diagram)

Burner Bar: Carbon Steel with 15 Flame Ports

SPECIFICATIONS

APPROVED GASES: **LP (PROPANE) GAS ONLY**

MAX WORKING PRESSURE: 1/2 PSIG

MAX TESTING PRESSURE: 10 PSI

BTU/H RATING: 20,000

DIMENSIONS:


OVERALL LENGTH: 20"

MIXING CHAMBER LENGTH: 3 1/4"

MIXING CHAMBER HEIGHT: 2"

INLET THREADS (A&B) 1/2" FIP

BURNER BAR THREADS 3/8" MIP

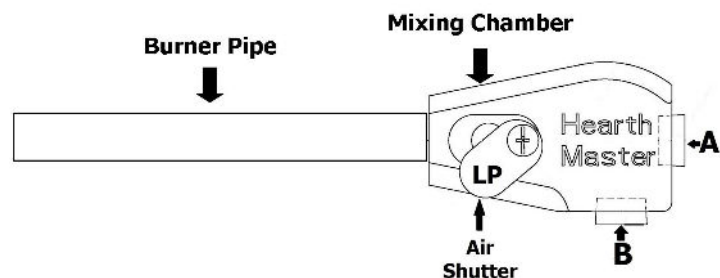

Rev. 3.23

Pro-Flex™
Traditional CSST

FlakJacket™
Arc-Resistant CSST

HearthMaster™
Fireplace & Log Lighter
Valves, Bars, etc.

Pro-Poly™
Underground Gas
Piping System



Pro-Flex, LLC • P: 877.798.6291 • F: 765-798-6139 • E: sales@proflexcsst.com