

Pro-Poly™ Anodeless Gas Riser



PERSR SERIES

ITEM # SUBMITTED: _____
 JOB NAME: _____
 LOCATION: _____
 ENGINEER: _____
 CONTRACTOR: _____
 PO #: _____
 TAG: _____

APPLICATION

The Pro-Poly™ PERSR Series Anodeless Gas Riser is for use in Natural and LP (Propane) underground gas applications utilizing Polyethylene (MDPE) gas pipelines. Meets or exceeds ASTM D2513 Category 1 and ASTM F1973 specifications.

INSTALLATION

Product installation and system testing shall be in accordance with all applicable local codes and the Pro-Poly Installation Guide.

MATERIALS

Steel Gas Carrier: Sch 40 & 80—ASTM A53/API 5L

Pipe Threads: ASTM B117 **Welds:** API 1104


Polyethylene Pipe: ASTM D2513

Epoxy Coating: 8mm minimum thickness, AGA 49 grey, Cathodic disbondment testing per ASTM G8, Salt Spray testing per ASTM B117, Impact resistance testing per ASTM G14


SPECIFICATIONS

APPROVED GASES: **LP (PROPANE) & NATURAL GAS**

MAX WORKING PRESSURE: 80 PSIG

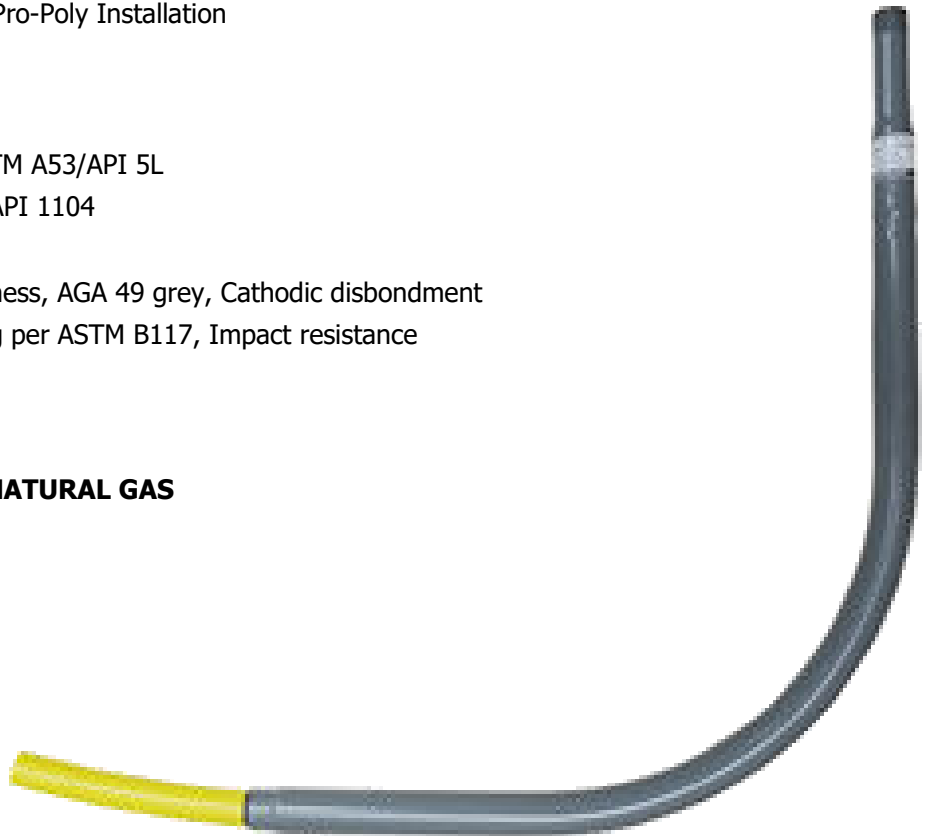

DIMENSIONS:



Part Number	Size	Dimensions			Weight
		V	H	W	
PERSR-12P	1/2" CTS (.625" X .090")	30	18	1	5
PERSR-34	3/4" SDR 11	30	18	1.2	6
PERSR-01	1" SDR 11	30	18	1.6	7
PERSR-0114	1 1/4" SDR 11	30	26	2	10
PERSR10-0114	1 1/4" SDR 10	30	26	2	10
PERSR-015	1 1/2" SDR 11	30	30	2.2	15
PERSR-02	2" SDR 11	36	30	2.6	30



Pro-Flex™
Traditional CSST

Pro-Flex LLC

FlakJacket™
Arc-Resistant CSST

www.proflexcsst.com

HearthMaster™
Gas Valves, Keys & Bars

1-877-798-6291

Pro-Poly™
Underground Gas Piping

sales@proflexcsst.com