




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Coupling

125# Lead Free Brass*

Inches / Pounds

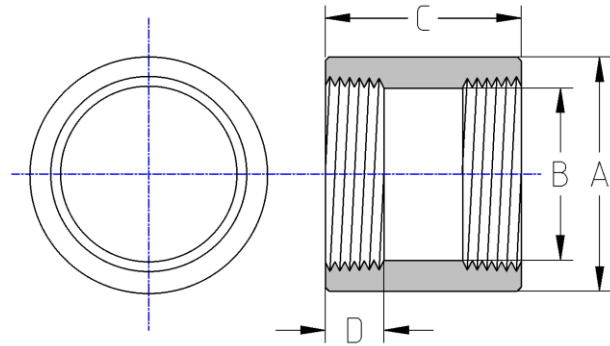

Nominal Pipe Size	Outside Diameter Min. (A)	Inside Diameter (B) Min/Max	End to End (C)	Internal Thread Length Min. (D)	Nominal Metal Thickness	Approx. Weight (in Pounds)
1/8	0.67	0.41 / 0.44	0.80	0.25	0.08	0.05
1/4	0.81	0.54 / 0.58	0.97	0.32	0.08	0.08
3/8	1.00	0.67 / 0.72	1.05	0.36	0.09	0.13
1/2	1.17	0.84 / 0.90	1.29	0.43	0.09	0.19
3/4	1.42	1.05 / 1.11	1.43	0.50	0.10	0.28
1	1.72	1.31 / 1.38	1.68	0.58	0.11	0.48
1 1/4	2.10	1.66 / 1.73	1.86	0.67	0.12	0.69
1 1/2	2.38	1.90 / 1.97	1.92	0.70	0.13	0.88
2	2.92	2.37 / 2.44	2.20	0.75	0.15	1.42
2 1/2	3.49	2.87 / 2.97	2.88	0.92	0.17	2.64
3	4.20	3.50 / 3.60	3.18	0.98	0.19	3.87
4	5.31	4.50 / 4.60	3.69	1.08	0.22	6.19

Lead Free Brass* Castings conform to ASTM B584 C89833
Lead Free Brass* Fitting Dimensions conform to ASME B16.15
NPT Threads on all fittings conform to ASME B1.20.1

NSF/ANSI/CAN 61 Drinking Water System Components – Health Effects
NSF/ANSI/CAN 372 Drinking Water System Components – Lead Content

***Conforms with lead content requirements for lead-free plumbing as defined by the U.S. Safe Drinking Water Act. Certified <0.25 weighted average % lead.**