




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Reducing Coupling
125# Lead Free Brass*
Inches / Pounds

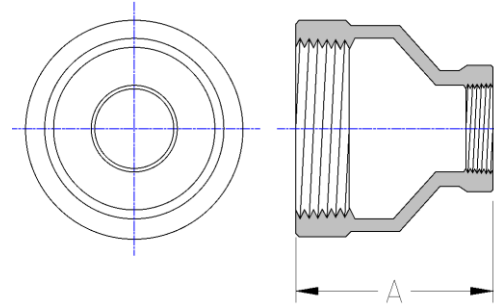

Size	A	Nominal Metal Thickness	Approximate Weight (in Pounds)
1/4 x 1/8	0.88	0.08	0.07
3/8 x 1/8	0.92	0.09	0.11
3/8 x 1/4	1.01	0.09	0.11
1/2 x 1/8	1.13	0.09	0.14
1/2 x 1/4	1.13	0.09	0.15
1/2 x 3/8	1.17	0.09	0.16
3/4 x 1/8	1.24	0.1	0.24
3/4 x 1/4	1.24	0.1	0.22
3/4 x 3/8	1.24	0.1	0.25
3/4 x 1/2	1.36	0.1	0.26
1 x 1/4	1.49	0.11	0.35
1 x 3/8	1.49	0.11	0.35
1 x 1/2	1.49	0.11	0.39
1 x 3/4	1.56	0.11	0.42
1 1/4 x 3/8	1.65	0.12	0.54
1 1/4 x 1/2	1.65	0.12	0.60
1 1/4 x 3/4	1.65	0.12	0.64
1 1/4 x 1	1.77	0.12	0.68
1 1/2 x 3/8	1.8	0.13	0.68
1 1/2 x 1/2	1.8	0.13	0.77
1 1/2 x 3/4	1.8	0.13	0.88
1 1/2 x 1	1.8	0.13	0.90
1 1/2 x 1 1/4	1.89	0.13	0.90
2 x 1/2	2.03	0.15	1.15
2 x 3/4	2.03	0.15	1.34
2 x 1	2.03	0.15	1.40
2 x 1 1/4	2.03	0.15	1.53
2 x 1 1/2	2.06	0.15	1.55



SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Size	A	Nominal Metal Thickness	Approximate Weight (in Pounds)
2½ x ½	3.25	0.17	1.66
2½ x ¾	3.25	0.17	1.64
2½ x 1	3.25	0.17	1.84
2½ x 1¼	3.25	0.17	2.00
2½ x 1½	3.25	0.17	2.09
2½ x 2	3.25	0.17	2.50
3 x ½	3.69	0.19	2.48
3 x ¾	3.69	0.19	2.26
3 x 1	3.69	0.19	3.16
3 x 1¼	3.69	0.19	3.22
3 x 1½	3.69	0.19	3.30
3 x 2	3.69	0.19	3.23
3 x 2½	3.69	0.19	3.31
4 x ½	4.38	0.22	3.36
4 x ¾	4.38	0.22	2.98
4 x 1	4.38	0.22	3.56
4 x 1¼	4.38	0.22	3.70
4 x 1½	4.38	0.22	4.20
4 x 2	4.38	0.22	5.10
4 x 2½	4.38	0.22	5.93
4 x 3	4.38	0.22	6.55

Lead Free Brass* Castings conform to ASTM B584 C89833
Lead Free Brass* Fitting Dimensions conform to ASME B16.15
NPT Threads on all fittings conform to ASME B1.20.1

NSF/ANSI/CAN 61 Drinking Water System Components – Health Effects
NSF/ANSI/CAN 372 Drinking Water System Components – Lead Content

***Conforms with lead content requirements for lead-free plumbing as defined by the U.S. Safe Drinking Water Act. Certified <0.25 weighted average % lead.**