




Street 90° Elbow
125# Lead Free Brass*
Inches / Pounds

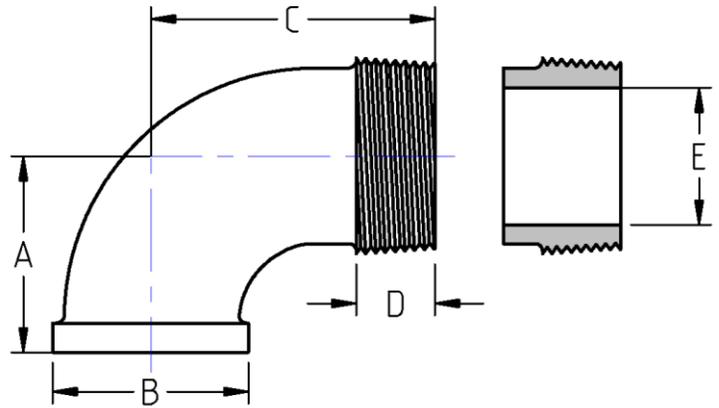

Nominal Pipe Size	Center to End (A)	Outside Diameter (B)	Center to End (C)	Min. Length of Male Threads (D)	Max. Port Diameter (E)	Nominal Metal Thickness	Approx. Weight (in Pounds)
1/8	0.54	0.69	0.92	0.27	0.22	0.08	0.05
1/4	0.71	0.85	1.11	0.41	0.28	0.08	0.10
3/8	0.82	1.01	1.24	0.41	0.40	0.09	0.15
1/2	1.01	1.20	1.48	0.54	0.53	0.09	0.22
3/4	1.18	1.44	1.65	0.55	0.72	0.10	0.35
1	1.43	1.76	1.98	0.69	0.93	0.11	0.59
1 1/4	1.69	2.13	2.24	0.71	1.25	0.12	0.96
1 1/2	1.84	2.40	2.46	0.73	1.47	0.13	1.21
2	2.12	2.96	2.88	0.76	1.91	0.15	1.98
2 1/2	2.64	3.54	3.80	1.18	2.50	0.17	3.59
3	3.01	4.25	4.45	1.26	3.13	0.19	5.74
4	3.72	5.39	5.63	1.34	4.12	0.22	10.63

Lead Free Brass* Castings conform to ASTM B584 C89833
Lead Free Brass* Fitting Dimensions conform to ASME B16.15
 NPT Threads on all fittings conform to ASME B1.20.1

NSF/ANSI/CAN 61 Drinking Water System Components – Health Effects
NSF/ANSI/CAN 372 Drinking Water System Components – Lead Content

***Conforms with lead content requirements for lead-free plumbing as defined by the U.S. Safe Drinking Water Act. Certified <0.25 weighted average % lead.**