




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Caps
SCHEDULE 40S
Inches / Pounds

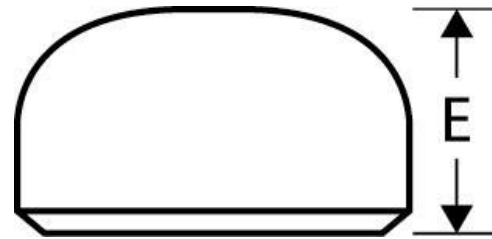

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.109	1.00	40S	0.08
3/4	1.05	0.824	0.113	1.25	40S	0.14
1	1.32	1.049	0.133	1.50	40S	0.21
1 1/4	1.66	1.380	0.140	1.50	40S	0.33
1 1/2	1.90	1.610	0.145	1.50	40S	0.54
2	2.38	2.067	0.154	1.50	40S	0.8
2 1/2	2.88	2.469	0.203	1.50	40S	1
3	3.50	3.068	0.216	2.00	40S	1.7
3 1/2	4.00	3.548	0.226	2.50	40S	2.3
4	4.50	4.026	0.237	2.50	40S	2.8
5	5.56	5.047	0.258	3.00	40S	4.6
6	6.62	6.065	0.280	3.50	40S	6.9
8	8.62	7.981	0.322	4.00	40S	11.8
10	10.75	10.020	0.365	5.00	40S	20.8
12	12.75	12.000	0.375	6.00	40S	30.3
14	14.00	13.250	0.375	6.50	40S	36.5
16	16.00	15.250	0.375	7.00	40S	43.5
18	18.00	17.250	0.375	8.00	40S	57
20	20.00	19.250	0.375	9.00	40S	75.7
22	22.00	21.250	0.375	10.00	40S	86
24	24.00	23.250	0.375	10.50	40S	101

** Dimensions conform to ASME B16.9*

Material Specification ASTM SA/A 403 Grades WP304/304L-W and WP316/316L-W