




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Long Radius 90° Elbows
SCHEDULE 40S
Inches / Pounds

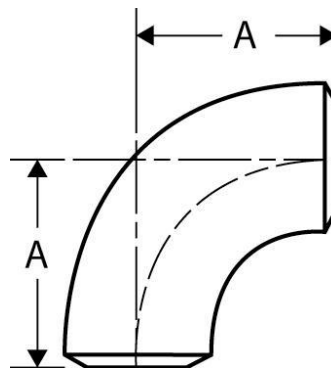

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.109	1.50	40S	0.16
3/4	1.05	0.824	0.113	1.50	40S	0.17
1	1.32	1.049	0.133	1.50	40S	0.40
1 1/4	1.66	1.380	0.140	1.88	40S	0.55
1 1/2	1.90	1.610	0.145	2.25	40S	0.80
2	2.37	2.067	0.154	3.00	40S	1.6
2 1/2	2.88	2.469	0.203	3.75	40S	3.2
3	3.50	3.068	0.216	4.50	40S	4.8
3 1/2	4.00	3.548	0.226	5.25	40S	6.6
4	4.50	4.026	0.237	6.00	40S	8.9
5	5.56	5.047	0.258	7.50	40S	15.1
6	6.63	6.065	0.280	9.00	40S	24
8	8.63	7.981	0.322	12.00	40S	47.8
10	10.75	10.020	0.365	15.00	40S	83.4
12	12.75	12.000	0.375	18.00	40S	123
14	14.00	13.250	0.375	21.00	40S	155
16	16.00	15.250	0.375	24.00	40S	206
18	18.00	17.250	0.375	27.00	40S	262
20	20.00	19.250	0.375	30.00	40S	324
22	22.00	21.250	0.375	33.00	40S	385
24	24.00	23.250	0.375	36.00	40S	466

** Dimensions conform to ASME B16.9*

Material Specification ASTM SA/A 403 Grades WP304/304L-W and WP316/316L-W