




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Straight Tees
SCHEDULE 10S
Inches / Pounds

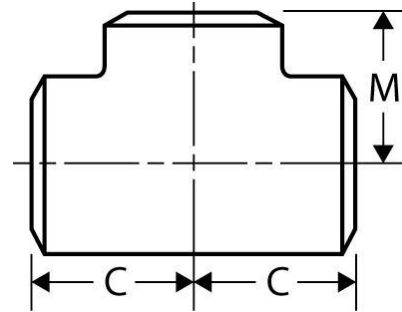

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center To End (C)	Center To End (M)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.083	1.00	1.00	10S	0.09
3/4	1.05	0.824	0.083	1.12	1.12	10S	0.26
1	1.32	1.049	0.109	1.50	1.50	10S	0.56
1 1/4	1.66	1.380	0.109	1.88	1.88	10S	0.45
1 1/2	1.90	1.610	0.109	2.25	2.25	10S	1.21
2	2.38	2.067	0.109	2.50	2.50	10S	1.55
2 1/2	2.88	2.469	0.120	3.00	3.00	10S	4.28
3	3.50	3.068	0.120	3.38	3.38	10S	3.75
4	4.50	4.026	0.120	4.12	4.12	10S	5.46
5	5.56	5.047	0.134	4.88	4.88	10S	8.55
6	6.62	6.065	0.134	5.62	5.62	10S	11.3
8	8.62	7.981	0.148	7.00	7.00	10S	20.8
10	10.75	10.020	0.165	8.50	8.50	10S	40.8
12	12.75	12.000	0.180	10.00	10.00	10S	46.3
14	14.00	13.250	0.188	11.00	11.00	10S	70
16	16.00	15.250	0.188	12.00	12.00	10S	87
18	18.00	17.250	0.188	13.50	13.50	10S	163
20	20.00	19.250	0.218	15.00	15.00	10S	210
24	24.00	23.250	0.250	17.00	17.00	10S	304

*** Dimensions conform to ASME B16.9**

Material Specification ASTM SA/A 403 Grades WP304/304L-W and WP316/316L-W