




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Straight Tees
SCHEDULE 40S
Inches / Pounds

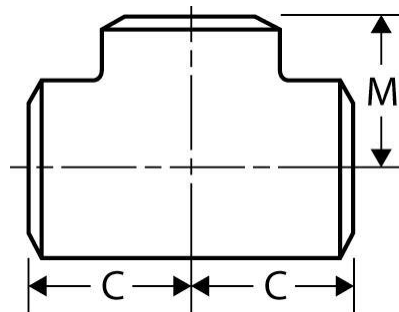

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center To End (C)	Center To End (M)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.109	1.00	1.00	40S	0.35
3/4	1.05	0.824	0.113	1.12	1.12	40S	0.50
1	1.32	1.049	0.133	1.50	1.50	40S	0.75
1 1/4	1.66	1.380	0.140	1.88	1.88	40S	1.3
1 1/2	1.90	1.610	0.145	2.25	2.25	40S	1.9
2	2.38	2.067	0.154	2.50	2.50	40S	3.2
2 1/2	2.88	2.469	0.203	3.00	3.00	40S	5.8
3	3.50	3.068	0.216	3.38	3.38	40S	7.2
3 1/2	4.00	3.548	0.226	3.75	3.75	40S	9.5
4	4.50	4.026	0.237	4.12	4.12	40S	12.7
5	5.56	5.047	0.258	4.88	4.88	40S	20.8
6	6.62	6.065	0.280	5.62	5.62	40S	33.1
8	8.62	7.981	0.322	7.00	7.00	40S	56.5
10	10.75	10.020	0.365	8.50	8.50	40S	90.9
12	12.75	12.000	0.375	10.00	10.00	40S	136
14	14.00	13.250	0.375	11.00	11.00	40S	162
16	16.00	15.250	0.375	12.00	12.00	40S	206
18	18.00	17.250	0.375	13.50	13.50	40S	272
20	20.00	19.250	0.375	15.00	15.00	40S	350
22	22.00	21.250	0.375	16.50	16.50	40S	464
24	24.00	23.250	0.375	17.00	17.00	40S	508

** Dimensions conform to ASME B16.9*

Material Specification ASTM SA/A 403 Grades WP304/304L-W and WP316/316L-W