


Blind Flange

CLASS 150

Inches / Pounds

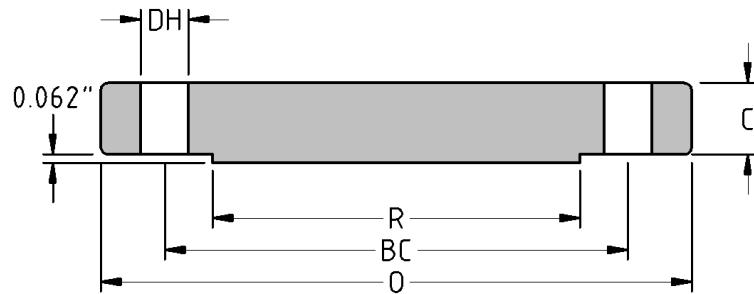


Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	No. of Holes	Diam. of Holes (DH)	Diam. of Bolts	Diam. of Bolt Circle (BC)	Approx. Weight (in Pounds)
1/2	3.50	0.38	1.38	4	0.62	0.50	2.38	1
3/4	3.88	0.44	1.69	4	0.62	0.50	2.75	2
1	4.25	0.5	2.00	4	0.62	0.50	3.12	2
1 1/4	4.62	0.56	2.50	4	0.62	0.50	3.50	3
1 1/2	5.00	0.63	2.88	4	0.62	0.50	3.88	4
2	6.00	0.69	3.62	4	0.75	0.62	4.75	5
2 1/2	7.00	0.82	4.12	4	0.75	0.62	5.50	7
3	7.50	0.88	5.00	4	0.75	0.62	6.00	9
3 1/2	8.50	0.88	5.50	8	0.75	0.62	7.00	13
4	9.00	0.88	6.19	8	0.75	0.62	7.50	17
5	10.00	0.88	7.31	8	0.88	0.75	8.50	20
6	11.00	0.94	8.50	8	0.88	0.75	9.50	26
8	13.50	1.06	10.62	8	0.88	0.75	11.75	45
10	16.00	1.13	12.75	12	1.00	0.88	14.25	70
12	19.00	1.19	15.00	12	1.00	0.88	17.00	110
14	21.00	1.32	16.25	12	1.12	1.00	18.75	140
16	23.50	1.38	18.50	16	1.12	1.00	21.25	180
18	25.00	1.5	21.00	16	1.25	1.12	22.75	220
20	27.50	1.63	23.00	20	1.25	1.12	25.00	285
22	29.50	1.82	25.25	20	1.38	1.25	27.25	355
24	32.00	1.88	27.25	20	1.38	1.25	29.50	430

** Dimensions conform to ASTM A/SA-105; ASME B16.5*

Blind Flange

CLASS 300

Inches / Pounds

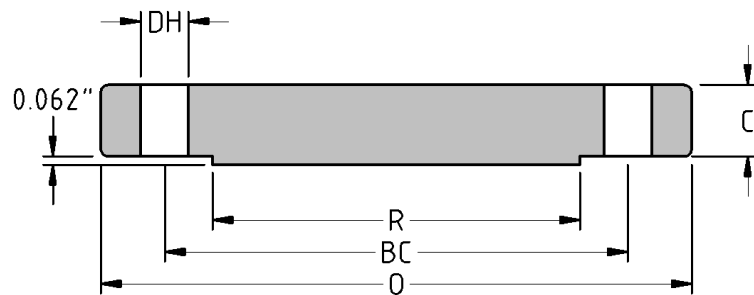


Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	No. of Holes	Diam. of Holes (DH)	Diam. of Bolts	Diam. of Bolt Circle (BC)	Approx. Weight (in Pounds)
½	3.75	0.50	1.38	4	0.62	0.50	2.62	2
¾	4.62	0.56	1.69	4	0.75	0.62	3.25	3
1	4.88	0.63	2.00	4	0.75	0.62	3.50	3
1 ¼	5.25	0.69	2.50	4	0.75	0.62	3.88	4
1 ½	6.12	0.75	2.88	4	0.88	0.75	4.50	6
2	6.50	0.82	3.62	8	0.75	0.62	5.00	8
2 ½	7.50	0.94	4.12	8	0.88	0.75	5.88	12
3	8.25	1.06	5.00	8	0.88	0.75	6.62	16
3 ½	9.00	1.13	5.50	8	0.88	0.75	7.25	21
4	10.00	1.19	6.19	8	0.88	0.75	7.88	27
5	11.00	1.32	7.31	8	0.88	0.75	9.25	35
6	12.50	1.38	8.50	12	0.88	0.75	10.62	50
8	15.00	1.56	10.62	12	1.00	0.88	13.00	81
10	17.50	1.82	12.75	16	1.12	1.00	15.25	124
12	20.50	1.94	15.00	16	1.25	1.12	17.75	185
14	23.00	2.06	16.25	20	1.25	1.12	20.25	250
16	25.50	2.19	18.50	20	1.38	1.25	22.50	295
18	28.00	2.32	21.00	24	1.38	1.25	24.75	395
20	30.50	2.44	23.00	24	1.38	1.25	27.00	505
24	36.00	2.69	27.25	24	1.62	1.50	32.00	790

** Dimensions conform to ASTM A/SA-105; ASME B16.5*

Blind Flange

CLASS 600

Inches / Pounds

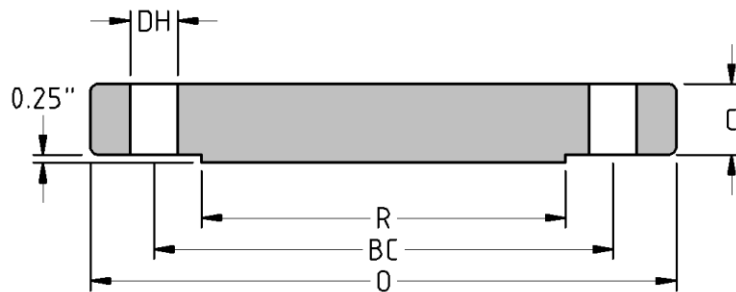

Nominal Pipe Size	Outside Diam. of Flange (O)	Thick. of Flange (C)	Diam. of Raised Face (R)	No. of Holes	Diam. of Holes (DH)	Diam. of Bolts	Diam. of Bolt Circle (BC)	Approx. Weight (in Pounds)
1/2	3.75	0.56	1.38	4	0.62	0.50	2.62	2
3/4	4.62	0.62	1.69	4	0.75	0.62	3.25	3
1	4.88	0.69	2.00	4	0.75	0.62	3.50	4
1 1/4	5.25	0.81	2.50	4	0.75	0.62	3.88	5
1 1/2	6.12	0.88	2.88	4	0.88	0.75	4.50	8
2	6.50	1.00	3.62	8	0.75	0.62	5.00	10
2 1/2	7.50	1.12	4.12	8	0.88	0.75	5.88	15
3	8.25	1.25	5.00	8	0.88	0.75	6.62	20
3 1/2	9.00	1.38	5.50	8	1.00	0.88	7.25	29
4	10.75	1.50	6.19	8	1.00	0.88	8.50	41
5	13.00	1.75	7.31	8	1.12	1.00	10.50	68
6	14.00	1.88	8.50	12	1.12	1.00	11.50	86
8	16.50	2.19	10.62	12	1.25	1.12	13.75	140
10	20.00	2.50	12.75	16	1.38	1.25	17.00	230
12	22.00	2.62	15.00	20	1.38	1.25	19.25	295
14	23.75	2.75	16.25	20	1.50	1.38	20.75	355
16	27.00	3.00	18.50	20	1.62	1.50	23.75	495
18	29.25	3.25	21.00	20	1.75	1.62	25.75	630
20	32.00	3.50	23.00	24	1.75	1.62	28.50	810
24	37.00	4.00	27.25	24	2.00	1.88	33.00	1250

** Dimensions conform to ASTM A/SA-105N; ASME B16.5*