


Caps

STANDARD WEIGHT

Inches / Pounds

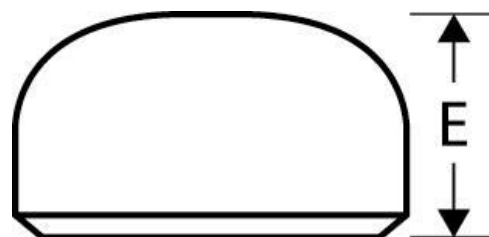

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.109	1.00	STD/40	0.08
3/4	1.05	0.824	0.113	1.25	STD/40	0.14
1	1.32	1.049	0.133	1.50	STD/40	0.21
1 1/4	1.66	1.380	0.140	1.50	STD/40	0.33
1 1/2	1.90	1.610	0.145	1.50	STD/40	0.54
2	2.38	2.067	0.154	1.50	STD/40	0.8
2 1/2	2.88	2.469	0.203	1.50	STD/40	1
3	3.50	3.068	0.216	2.00	STD/40	1.7
3 1/2	4.00	3.548	0.226	2.50	STD/40	2.3
4	4.50	4.026	0.237	2.50	STD/40	2.8
5	5.56	5.047	0.258	3.00	STD/40	4.6
6	6.62	6.065	0.280	3.50	STD/40	6.9
8	8.62	7.981	0.322	4.00	STD/40	11.8
10	10.75	10.020	0.365	5.00	STD/40	20.8
12	12.75	12.000	0.375	6.00	STD*	30.3
14	14.00	13.250	0.375	6.50	STD/30	36.5
16	16.00	15.250	0.375	7.00	STD/30	43.5
18	18.00	17.250	0.375	8.00	STD*	57
20	20.00	19.250	0.375	9.00	STD/20	75.7
22	22.00	21.250	0.375	10.00	STD/20	86
24	24.00	23.250	0.375	10.50	STD/20	101
26	26.00	25.250	0.375	10.50	STD*	110
30	30.00	29.250	0.380	10.50	STD*	137
34	34.00	33.250	0.380	10.50	STD*	160
36	36.00	35.250	0.380	10.50	STD*	175
42	42.00	41.250	0.380	12.00	STD*	229
48	48.00	47.240	0.380	13.50	STD*	350


*** STD* designates Standard Weight (standard wall). This size and thickness do not correspond to any pipe schedule number.**

*** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.**

Caps

EXTRA HEAVY

Inches / Pounds

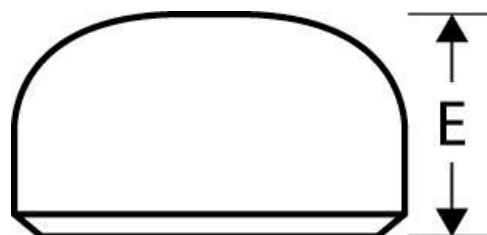

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.546	0.147	1.00	XH/80	0.1
3/4	1.050	0.742	0.154	1.25	XH/80	0.16
1	1.315	0.957	0.179	1.50	XH/80	0.28
1 1/4	1.660	1.278	0.191	1.50	XH/80	0.48
1 1/2	1.900	1.500	0.200	1.50	XH/80	0.67
2	2.375	1.939	0.218	1.50	XH/80	0.92
2 1/2	2.875	2.323	0.276	1.50	XH/80	1.3
3	3.500	2.900	0.300	2.00	XH/80	2.1
3 1/2	4.000	3.364	0.318	2.50	XH/80	3
4	4.500	3.826	0.337	2.50	XH/80	3.5
5	5.563	4.813	0.375	3.00	XH/80	5.8
6	6.625	5.761	0.432	4.00	XH/80	9.3
8	8.625	7.625	0.500	4.00	XH/80	16
10	10.75	9.750	0.500	5.00	XH/60	26
12	12.75	11.75	0.500	6.00	XH*	38
14	14.00	13.00	0.500	6.50	XH*	47
16	16.00	15.00	0.500	7.00	XH/40	57
18	18.00	17.00	0.500	8.00	XH*	78
20	20.00	19.00	0.500	9.00	XH/30	100
22	22.00	21.00	0.500	10.00	XH*	115
24	24.00	23.00	0.500	10.50	XH*	145
26	26.00	25.00	0.500	10.50	XH*	175
30	30.00	29.00	0.500	10.50	XH/20	634
34	34.00	33.00	0.500	10.50	XH/20	210
36	36.00	35.00	0.500	10.50	XH/20	913
42	42.00	41.00	0.500	12.00	XH*	1,300
48	48.00	47.00	0.500	13.50	XH*	1,675


*** XH* designates Extra Strong (extra strong wall). This size and thickness do not correspond to any pipe schedule number.**

*** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.**

Caps

SCHEDULE 160

Inches / Pounds

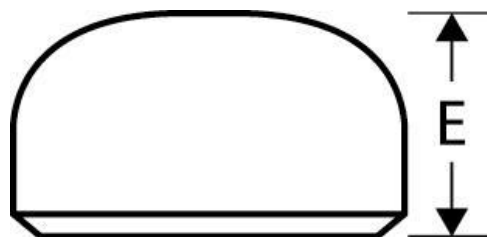


Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Approximate Weight (in Pounds)
1/2	0.84	0.464	0.188	1.00	0.30
3/4	1.05	0.612	0.219	1.00	0.30
1	1.32	0.815	0.250	1.50	0.40
1 1/4	1.66	1.160	0.250	1.50	0.50
1 1/2	1.90	1.338	0.281	1.50	0.60
2	2.38	1.687	0.344	1.75	1.30
2 1/2	2.88	2.125	0.375	2.00	1.80
3	3.50	2.624	0.438	2.00	2.90
4	4.50	3.438	0.531	3.00	5.90
5	5.56	4.313	0.625	3.50	10
6	6.63	5.187	0.719	4.00	15
8	8.63	6.813	0.906	5.00	31
10	10.75	8.500	1.125	6.00	57
12	12.75	10.126	1.312	7.00	95
14	14.00	11.188	1.406	7.50	200
16	16.00	12.812	1.594	8.00	297
18	18.00	14.438	1.781	9.00	360
20	20.00	16.062	1.969	10.00	420
22	22.00	17.750	2.125	10.00	-
24	24.00	19.312	2.344	12.00	535

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*

Caps

SCHEDULE XXH

Inches / Pounds

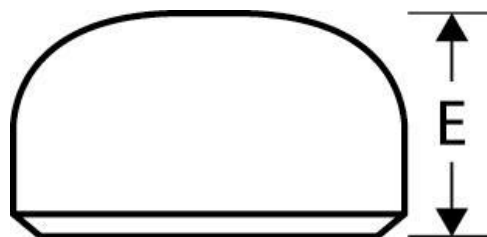

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Approximate Weight (in Pounds)
1/2	0.840	0.252	0.294	1.00	0.50
3/4	1.030	0.414	0.308	1.00	0.75
1	1.315	0.599	0.358	1.50	1.00
1 1/4	1.660	0.896	0.382	1.50	1.50
1 1/2	1.900	1.100	0.400	1.50	2.50
2	2.375	1.499	0.438	1.75	3.00
2 1/2	2.875	1.771	0.552	2.00	4.00
3	3.500	2.300	0.600	2.00	6.00
4	4.500	3.152	0.674	3.00	9.00
5	5.562	4.062	0.750	3.50	13.50
6	6.625	4.897	0.864	4.00	18.00
8	8.625	6.875	0.875	5.00	26.00
10	10.75	8.750	1.000	6.00	46.00
12	12.75	10.750	1.000	7.00	68.00

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*