data sheet
ARGCO

Quality
PT
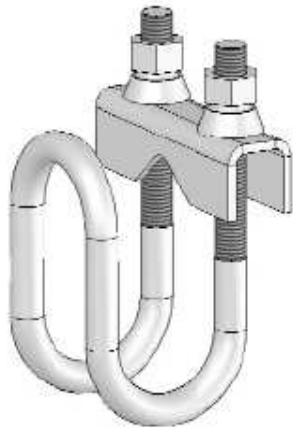**GUARANTEED**

Model 010 SWAY BRACE PIPE ATTACHMENT

FUNCTION:
Designed for bracing pipe against sway and seismic disturbance.
The pipe attachment component of a sway brace system used in conjunction with a structura lattachment fitting and joined together wth a bracing pipe element forming a completeswaybraceassembly.

Sway brace assemblies are intended to be installed in accordance with NFPA 13 and the manufacturer's installation instructions.
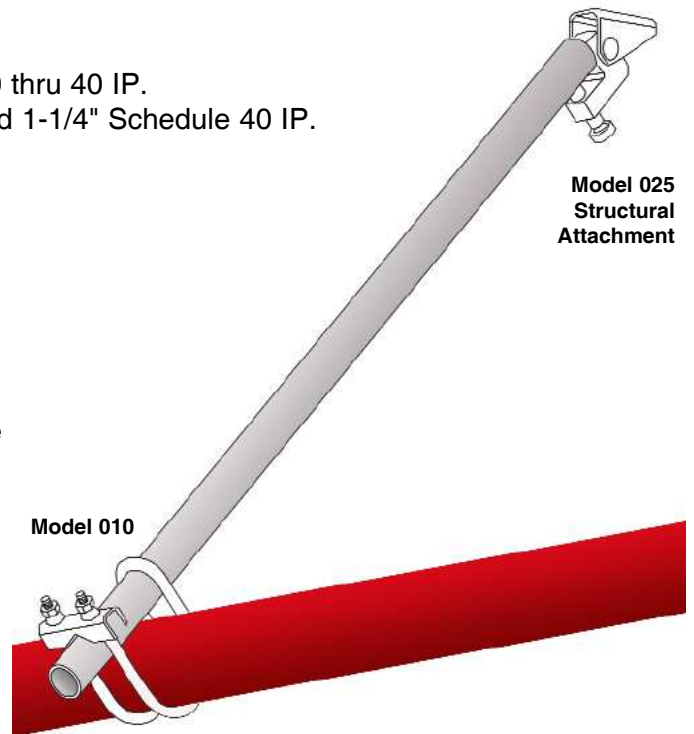
SIZE:
Pipe size 1" thru 6" Schedule 10 thru 40 IP.
Pipe size used for bracing 1" and 1-1/4" Schedule 40 IP.
FINISH:Electro-galvanized

c (UL) us
LISTED

FM
c APPROVED us

MATERIAL: Low Carbon Steel

Model 025 Structural Attachment

NSTALLATION:
Place over the pipe to be braced, adjust brace angle, and insert bracing pipe through opening leaving a minimum of 1" extending from attachment.
Brace pipe can be installed on top or bottom of pipe to be braced.
Tighten nuts down evenly until hex head breaks off.

APPROVALS: Underwriters Laboratories listed for US and Canada
Listed for use with NFPA and PHD sway brace components only

Model 010

Pipe Size	Brace Size	Maximum Design Load SCH10 Pipe	Maximum Design Load SCH40 Pipe
1	1 & 1 1/4	655	655
1 1/4	1 & 1 1/4	655	655
1 1/2	1 & 1 1/4	655	655
2	1 & 1 1/4	655	655
2 1/2	1 & 1 1/4	655	655
3	1 & 1 1/4	655	655
4	1 & 1 1/4	N/A	655
6	1 1/4	1265	1265

CROSS REFERENCE:
Erico: CSBQIK
Afcon: Model E
Tolco: 1000

**FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM**