

Building connections that last™



SCI® Bronze

Fittings Class 125

Flanges Class 150

*See page 83 for Lead Free





Bronze Fittings Class 125 Bronze Flanges Class 150

Bronze Fitting Specifications

-  branded bronze fittings are UL Listed
- Canadian Registration Numbers available at www.smithcooper.com
- Bronze fittings conform to AWWA C800
- Bronze castings conform to ASTM B62, UNS Alloy C83600
- Bronze fitting dimensions conform to ASME B16.15
- Thread protectors on all male threads
- NPT threads on all fittings conform to ASME B1.20.1
- Bronze unions conform to specification A-A-59617
- Manufacturing facilities are ISO 9001:2008
- SCI trademarked fittings and are 100% air tested
- ProPak™ Packaging



Bronze Flange Specifications

- Bronze castings conform to ASTM B62, UNS Alloy C83600
- Bronze flange dimensions conform to ASME B16.24
- NPT threads on all flanges conform to ASME B1.20.1
- Manufacturing facilities are ISO 9001:2008
- Flange dimensional data on page 196

Lead Free brass fittings
See page 83 - 87



SCI ProPak™ System

Note: Product contains brass which does not meet federal and state requirements for drinking water.



WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov




Fig. 36E 1 – 90° Elbow

Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36E 1001C	0.54	50	800	0.1
1/4	36E 1002C	0.71	35	560	0.1
3/8	36E 1003C	0.82	45	360	0.1
1/2	36E 1004C	1.01	50	200	0.2
3/4	36E 1006C	1.18	35	140	0.3
1	36E 1010C	1.43	20	80	0.6
1-1/4	36E 1012C	1.69	20	40	0.9
1-1/2	36E 1014C	1.84	15	30	1.2
2	36E 1020C	2.12	8	16	2.0
2-1/2	36E 1024C	2.70	6	12	3.8
3	36E 1030C	3.08	-	7	4.7
4	36E 1040C	3.79	-	3	9.7




Fig. 36RE1 – 90° Reducing Elbow

Size in	Part Number	A in	B in	Packing		Weight lb
				Inner	Master	
3/8 x 1/4	36RE1003002C	0.78	0.75	60	480	0.1
1/2 x 1/4	36RE1004002C	0.98	0.97	50	400	0.2
1/2 x 3/8	36RE1004003C	0.93	0.90	50	200	0.2
3/4 x 1/4	36RE1006002C	1.08	1.05	40	160	0.2
3/4 x 3/8	36RE1006003C	1.13	1.12	40	160	0.3
3/4 x 1/2	36RE1006004C	1.11	1.08	50	200	0.4
1 x 1/2	36RE1010004C	1.24	1.20	25	100	0.5
1 x 3/4	36RE1010006C	1.31	1.30	30	120	0.5
1-1/4 x 1/2	36RE1012004C	1.53	1.34	20	80	0.6
1-1/4 x 3/4	36RE1012006C	1.48	1.39	15	60	0.7
1-1/4 x 1	36RE1012010C	1.60	1.52	10	40	0.7
1-1/2 x 1/2	36RE1014004C	1.62	1.38	15	60	0.7
1-1/2 x 3/4	36RE1014006C	1.72	1.52	15	60	0.8
1-1/2 x 1	36RE1014010C	1.72	1.55	10	40	1.0
1-1/2 x 1-1/4	36RE1014012C	1.81	1.72	8	32	1.0
2 x 1/2	36RE1020004C	1.90	1.56	10	40	1.1
2 x 3/4	36RE1020006C	1.90	1.68	10	40	1.1
2 x 1	36RE1020010C	2.02	1.73	14	28	1.4
2 x 1-1/4	36RE1020012C	2.10	1.90	10	20	1.5
2 x 1-1/2	36RE1020014C	2.07	1.89	10	20	1.6
2-1/2 x 1	36RE1024010C	2.36	1.87	8	16	2.2
2-1/2 x 1-1/4	36RE1024012C	2.44	2.03	8	16	2.6
2-1/2 x 1-1/2	36RE1024014C	2.51	2.16	8	16	2.9
2-1/2 x 2	36RE1024020C	2.60	2.39	8	16	3.1
3 x 1-1/4	36RE1030012C	2.74	2.16	5	10	2.8
3 x 1-1/2	36RE1030014C	2.80	2.28	5	10	2.7
3 x 2	36RE1030020C	2.89	2.52	-	8	4.2
3 x 2-1/2	36RE1030024C	2.99	2.83	-	8	4.0





Fig. 36SE1 – 90° Street Elbow


Size in	Part Number	A in	B in	Packing		Weight lb
				Inner	Master	
1/8	36SE1001C	0.92	0.54	60	960	0.1
1/4	36SE1002C	1.11	0.71	35	560	0.1
3/8	36SE1003C	1.24	0.82	40	320	0.1
1/2	36SE1004C	1.48	1.01	75	300	0.2
3/4	36SE1006C	1.65	1.18	40	160	0.3
1	36SE1010C	1.98	1.43	40	80	0.5
1-1/4	36SE1012C	2.24	1.69	25	50	0.8
1-1/2	36SE1014C	2.46	1.84	9	36	1.1
2	36SE1020C	2.88	2.12	10	20	2.0
2-1/2	36SE1024C	3.86	2.70	-	10	4.0
3	36SE1030C	4.51	3.08	-	7	4.7
4	36SE1040C	5.69	3.79	-	3	11.4

**Fig. 36F 1 – 45° Elbow**


Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36F 1001C	0.42	50	800	0.1
1/4	36F 1002C	0.56	30	480	0.1
3/8	36F 1003C	0.63	50	400	0.1
1/2	36F 1004C	0.78	50	200	0.2
3/4	36F 1006C	0.89	40	160	0.3
1	36F 1010C	1.06	20	80	0.5
1-1/4	36F 1012C	1.22	20	40	0.7
1-1/2	36F 1014C	1.30	8	32	1.0
2	36F 1020C	1.45	12	24	1.7
2-1/2	36F 1024C	1.95	-	15	3.2
3	36F 1030C	2.17	-	10	4.7
4	36F 1040C	2.61	-	3	8.1

**Fig. 36SF1 – 45° Street Elbow**


Size in	Part Number	A in	B in	Packing		Weight lb
				Inner	Master	
1/8	36SF1001C	0.42	0.78	70	1120	0.05
1/4	36SF1002C	0.56	0.88	40	640	0.1
3/8	36SF1003C	0.63	0.92	50	600	0.1
1/2	36SF1004C	0.78	1.06	75	300	0.2
3/4	36SF1006C	0.89	1.23	40	160	0.3
1	36SF1010C	1.06	1.40	25	100	0.5
1-1/4	36SF1012C	1.22	1.64	10	40	0.7
1-1/2	36SF1014C	1.30	1.80	10	40	1.0
2	36SF1020C	1.45	2.14	12	24	1.5
2-1/2	36SF1024C	1.95	2.57	5	10	3.0
3	36SF1030C	2.17	3.00	-	6	5.0
4	36SF1040C	2.61	3.70	-	4	8.0

**Fig. 36T 1 – Tee**

Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36T 1001C	0.54	80	640	0.1
1/4	36T 1002C	0.71	50	400	0.1
3/8	36T 1003C	0.82	30	240	0.2
1/2	36T 1004C	1.01	40	160	0.3
3/4	36T 1006C	1.18	25	100	0.5
1	36T 1010C	1.43	25	50	0.8
1-1/4	36T 1012C	1.69	14	28	1.2
1-1/2	36T 1014C	1.84	15	30	1.6
2	36T 1020C	2.12	-	15	2.7
2-1/2	36T 1024C	2.70	-	10	5.1
3	36T 1030C	3.08	-	6	7.5
4	36T 1040C	3.79	-	2	13.3

**Fig. 36BT1 – Bull Head Tee**

Size in	Part Number	A in	B in	C in	Packing		Weight lb
					Inner	Master	
1/2 x 3/4	36BT1004006C	1.11	1.11	1.08	25	100	0.4
3/4 x 1	36BT1006010C	1.31	1.31	1.30	15	60	0.7
1 x 1-1/4	36BT1010012C	1.60	1.60	1.52	8	32	1.1
1 x 1-1/2	36BT1010014C	1.72	1.72	1.55	15	30	1.5







Fig. 36RT1 – Reducing Tee


Size in	Part Number	A in	B in	C in	Packing		Weight lb
					Inner	Master	
3/8 x 1/4	36RT1003002C	0.75	0.75	0.78	40	160	0.2
1/2 x 1/8	36RT1004001C	0.87	0.87	0.87	20	160	0.2
1/2 x 1/4	36RT1004002C	0.87	0.87	0.87	25	200	0.2
1/2 x 3/8	36RT1004003C	0.93	0.93	0.90	25	200	0.3
3/4 x 1/4	36RT1006002C	1.00	1.00	1.00	25	100	0.4
3/4 x 3/8	36RT1006003C	1.00	1.00	1.00	25	100	0.4
3/4 x 1/2	36RT1006004C	1.08	1.08	1.11	25	100	0.5
3/4 x 1/2 x 1/2	36RT1006004004C	1.08	1.01	1.11	25	100	0.4
3/4 x 1/2 x 3/4	36RT1006004006C	1.18	1.11	1.18	20	80	0.5
1 x 1/4	36RT1010002C	1.12	1.12	1.13	20	80	0.5
1 x 3/8	36RT1010003C	1.12	1.12	1.13	15	60	0.6
1 x 1/2	36RT1010004C	1.20	1.20	1.24	15	60	0.6
1 x 1/2 x 3/4	36RT1010004006C	1.30	1.11	1.31	20	80	0.6
1 x 1/2 x 1	36RT1010004010C	1.43	1.24	1.43	15	60	0.8
1 x 3/4	36RT1010006C	1.30	1.18	1.31	15	60	0.8
1 x 3/4 x 1/2	36RT1010006004C	1.20	1.08	1.24	20	80	0.6
1 x 3/4 x 3/4	36RT1010006006C	1.30	1.18	1.31	15	60	0.7
1 x 3/4 x 1	36RT1010006010C	1.43	1.31	1.43	15	60	0.8
1-1/4 x 1/2	36RT1012004C	1.29	1.29	1.41	20	40	0.8
1-1/4 x 3/4	36RT1012006C	1.39	1.39	1.48	20	40	0.9
1-1/4 x 1	36RT1012010C	1.52	1.52	1.60	20	40	1.2
1-1/4 x 1 x 1/2	36RT1012010004C	1.39	1.30	1.48	20	40	0.8
1-1/2 x 1/2	36RT1014004C	1.32	1.32	1.53	18	36	1.2
1-1/2 x 3/4	36RT1014006C	1.42	1.42	1.60	15	30	1.3
1-1/2 x 1	36RT1014010C	1.55	1.55	1.72	15	30	1.2
1-1/2 x 1-1/4	36RT1014012C	1.72	1.72	1.81	12	24	1.7
1-1/2 x 1-1/4 x 1	36RT1014012010C	1.55	1.52	1.72	15	30	1.2
1-1/2 x 1-1/4 x 1-1/2	36RT1014012014C	1.84	1.81	1.84	12	24	1.5
2 x 1/2	36RT1020004C	1.47	1.47	1.84	12	24	1.8
2 x 3/4	36RT1020006C	1.47	1.47	1.84	12	24	1.9
2 x 1	36RT1020010C	1.59	1.59	1.95	10	20	2.0
2 x 1-1/4	36RT1020012C	1.77	1.77	2.04	8	16	2.2
2 x 1-1/2	36RT1020014C	1.89	1.89	2.07	8	16	2.6
2-1/2 x 1-1/4	36RT1024012C	2.04	2.04	2.45	-	10	3.2
2-1/2 x 1-1/2	36RT1024014C	2.16	2.16	2.51	-	10	3.8
2-1/2 x 2	36RT1024020C	2.39	2.39	2.60	-	10	4.2
3 x 3/4	36RT1030006C	1.87	1.87	2.61	-	6	4.1
3 x 1	36RT1030010C	2.00	2.00	2.66	-	6	4.5
3 x 1-1/4	36RT1030012C	2.17	2.17	2.74	-	6	4.7
3 x 1-1/2	36RT1030014C	2.29	2.29	2.80	-	6	4.9
3 x 2	36RT1030020C	2.52	2.52	2.89	-	6	3.7
3 x 2-1/2	36RT1030024C	2.83	2.83	2.99	-	6	5.5
4 x 1	36RT1040010C	2.27	2.27	3.32	-	4	5.9
4 x 1-1/4	36RT1040012C	2.41	2.41	3.32	-	4	6.7
4 x 1-1/2	36RT1040014C	2.51	2.51	3.32	-	4	8.3
4 x 2	36RT1040020C	2.74	2.74	3.41	-	3	7.6
4 x 3	36RT1040030C	3.30	3.30	3.60	-	3	10.5

**Fig. 36X 1 – Cross**


Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36X 1001C	0.54	20	320	0.1
1/4	36X 1002C	0.71	40	320	0.2
3/8	36X 1003C	0.82	40	160	0.1
1/2	36X 1004C	1.01	30	120	0.4
3/4	36X 1006C	1.18	20	80	0.7
1	36X 1010C	1.43	20	40	1.0
1-1/4	36X 1012C	1.69	-	20	1.6
1-1/2	36X 1014C	1.84	-	18	2.1
2	36X 1020C	2.12	-	10	3.2
2-1/2	36X 1024C	2.70	-	6	5.5
3	36X 1030C	3.08	-	4	8.2
4	36X 1040C	3.79	-	2	13.5

**Fig. 36C 1 – Cap**


Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36C 1001C	0.53	120	1920	0.03
1/4	36C 1002C	0.63	80	1280	0.06
3/8	36C 1003C	0.68	60	720	0.1
1/2	36C 1004C	0.80	75	600	0.1
3/4	36C 1006C	0.90	40	320	0.1
1	36C 1010C	1.08	25	200	0.3
1-1/4	36C 1012C	1.12	25	100	0.5
1-1/2	36C 1014C	1.17	25	100	0.6
2	36C 1020C	1.36	18	72	0.9
2-1/2	36C 1024C	1.70	20	40	1.9
3	36C 1030C	1.80	12	24	2.7
4	36C 1040C	2.08	6	12	4.4
6	36C 1060C	2.50	6	6	10.0

**Fig. 36U 1 – Union**

Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36U 1001C	1.34	30	480	0.1
1/4	36U 1002C	1.45	20	240	0.2
3/8	36U 1003C	1.60	20	160	0.3
1/2	36U 1004C	1.60	40	160	0.5
3/4	36U 1006C	1.80	40	80	0.7
1	36U 1010C	2.00	30	60	1.1
1-1/4	36U 1012C	2.07	20	40	1.6
1-1/2	36U 1014C	2.33	15	30	2.0
2	36U 1020C	2.53	10	20	3.2
2-1/2	36U 1024C	3.33	-	10	5.3
3	36U 1030C	3.60	-	7	6.9
4	36U 1040C	3.80	-	4	12.0

**Fig. 36LN1 – Lock Nut***

Size in	Part Number	A in	B in	Packing		Weight lb
				Inner	Master	
1/8	36LN1001C	0.21	0.74	250	4000	0.02
1/4	36LN1002C	0.26	0.85	125	2000	0.03
3/8	36LN1003C	0.30	1.05	125	1500	0.04
1/2	36LN1004C	0.38	1.25	100	800	0.08
3/4	36LN1006C	0.40	1.50	60	480	0.1
1	36LN1010C	0.50	1.88	40	320	0.1
1-1/4	36LN1012C	0.50	2.15	30	240	0.2
1-1/2	36LN1014C	0.53	2.56	45	180	0.2
2	36LN1020C	0.57	3.10	25	100	0.4
2-1/2	36LN1024C	0.72	4.00	14	56	1.1



*NPSL Threads





Fig. 36CP1 – Coupling

Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36CP1001C	0.80	70	1120	0.1
1/4	36CP1002C	0.97	40	640	0.1
3/8	36CP1003C	1.05	50	600	0.1
1/2	36CP1004C	1.29	40	320	0.1
3/4	36CP1006C	1.43	50	200	0.2
1	36CP1010C	1.68	25	100	0.4
1-1/4	36CP1012C	1.86	20	80	0.6
1-1/2	36CP1014C	1.92	12	48	0.8
2	36CP1020C	2.20	12	24	1.3
2-1/2	36CP1024C	2.88	8	16	2.6
3	36CP1030C	3.18	8	16	3.7
4	36CP1040C	3.69	-	6	5.8

Fig. 36RC1 – Reducing Coupling




Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/4 x 1/8	36RC1002001C	0.88	50	600	0.08
3/8 x 1/8	36RC1003001C	0.92	35	420	0.1
3/8 x 1/4	36RC1003002C	1.01	40	480	0.1
1/2 x 1/8	36RC1004001C	1.13	50	400	0.1
1/2 x 1/4	36RC1004002C	1.13	50	400	0.1
1/2 x 3/8	36RC1004003C	1.17	40	320	0.1
3/4 x 1/8	36RC1006001C	1.24	35	280	0.1
3/4 x 1/4	36RC1006002C	1.24	30	240	0.2
3/4 x 3/8	36RC1006003C	1.24	50	200	0.2
3/4 x 1/2	36RC1006004C	1.36	60	240	0.2
1 x 1/4	36RC1010002C	1.49	45	180	0.3
1 x 3/8	36RC1010003C	1.49	30	120	0.4
1 x 1/2	36RC1010004C	1.49	30	120	0.3
1 x 3/4	36RC1010006C	1.56	25	100	0.4
1-1/4 x 1/2	36RC1012004C	1.65	25	100	0.6
1-1/4 x 3/4	36RC1012006C	1.65	25	100	0.6
1-1/4 x 1	36RC1012010C	1.77	15	60	0.5
1-1/2 x 1/2	36RC1014004C	1.8	15	60	0.7
1-1/2 x 3/4	36RC1014006C	1.8	15	60	0.8
1-1/2 x 1	36RC1014010C	1.8	15	60	0.6
1-1/2 x 1-1/4	36RC1014012C	1.89	12	48	0.9
2 x 1/2	36RC1020004C	2.03	12	48	1.2
2 x 3/4	36RC1020006C	2.03	12	48	1.2
2 x 1	36RC1020010C	2.03	12	48	0.9
2 x 1-1/4	36RC1020012C	2.03	14	28	1.3
2 x 1-1/2	36RC1020014C	2.06	12	24	1.0
2-1/2 x 1	36RC1024010C	3.25	-	25	2.0
2-1/2 x 1-1/4	36RC1024012C	3.25	-	25	2.2
2-1/2 x 1-1/2	36RC1024014C	3.25	-	25	2.2
2-1/2 x 2	36RC1024020C	3.25	-	25	2.4
3 x 1	36RC1030010C	3.69	-	20	2.5
3 x 1-1/4	36RC1030012C	3.69	-	20	2.1
3 x 1-1/2	36RC1030014C	3.69	-	20	2.3
3 x 2	36RC1030020C	3.69	-	20	3.6
3 x 2-1/2	36RC1030024C	3.69	-	12	3.9
4 x 2	36RC1040020C	4.38	-	10	6.0
4 x 2-1/2	36RC1040024C	4.38	-	10	5.9
4 x 3	36RC1040030C	4.38	-	6	6.5

**Fig. 36HB1 – Hex Bushing**

Size in	Part Number	A in	B in	Hex	Packing		Weight lb
					Inner	Master	
1/4 x 1/8	36HB1002001C	0.65	0.66	Out	120	1920	0.02
3/8 x 1/8	36HB1003001C	0.70	0.70	Out	75	1200	0.05
3/8 x 1/4	36HB1003002C	0.70	0.73	Out	75	1200	0.04
1/2 x 1/8	36HB1004001C	0.81	0.90	Out	100	800	0.10
1/2 x 1/4	36HB1004002C	0.81	0.90	Out	100	800	0.09
1/2 x 3/8	36HB1004003C	0.81	0.90	Out	100	800	0.07
3/4 x 1/8	36HB1006001C	0.88	1.18	Out	50	600	0.1
3/4 x 1/4	36HB1006002C	0.93	1.18	Out	40	480	0.1
3/4 x 3/8	36HB1006003C	0.93	1.18	Out	50	600	0.1
3/4 x 1/2	36HB1006004C	0.93	1.18	Out	40	480	0.1
1 x 1/4	36HB1010002C	1.13	1.12	In	50	400	0.2
1 x 3/8	36HB1010003C	1.13	1.12	In	50	400	0.2
1 x 1/2	36HB1010004C	1.10	1.44	Out	40	320	0.2
1 x 3/4	36HB1010006C	1.10	1.44	Out	40	360	0.2
1-1/4 x 1/2	36HB1012004C	1.18	1.80	In	30	120	0.3
1-1/4 x 3/4	36HB1012006C	1.18	1.80	Out	30	120	0.4
1-1/4 x 1	36HB1012010C	1.18	1.80	Out	30	120	0.3
1-1/2 x 1/4	36HB1014002C	1.27	1.15	In	25	100	0.4
1-1/2 x 3/8	36HB1014003C	1.30	1.34	Out	25	100	0.4
1-1/2 x 1/2	36HB1014004C	1.27	1.34	In	25	100	0.4
1-1/2 x 3/4	36HB1014006C	1.27	1.63	In	25	100	0.4
1-1/2 x 1	36HB1014010C	1.19	2.04	Out	25	100	0.5
1-1/2 x 1-1/4	36HB1014012C	1.19	2.04	Out	25	100	0.4
2 x 1/2	36HB1020004C	1.35	1.36	In	20	80	0.6
2 x 3/4	36HB1020006C	1.35	1.65	In	20	80	0.7
2 x 1	36HB1020010C	1.35	2.00	In	20	80	0.7
2 x 1-1/4	36HB1020012C	1.35	2.50	Out	20	80	0.8
2 x 1-1/2	36HB1020014C	1.35	2.55	Out	20	80	0.8
2-1/2 x 1/2	36HB1024004C	1.64	3.15	Out	15	60	1.2
2-1/2 x 3/4	36HB1024006C	1.58	1.65	In	15	60	1.1
2-1/2 x 1	36HB1024010C	1.58	2.00	In	12	48	1.1
2-1/2 x 1-1/4	36HB1024012C	1.60	2.39	In	12	48	1.2
2-1/2 x 1-1/2	36HB1024014C	1.52	2.70	In	12	48	1.3
2-1/2 x 2	36HB1024020C	1.62	3.15	Out	12	48	1.1
3 x 1/2	36HB1030004C	1.60	1.35	In	12	48	1.9
3 x 3/4	36HB1030006C	1.70	1.65	In	10	40	1.9
3 x 1	36HB1030010C	1.60	2.00	In	12	48	1.6
3 x 1-1/4	36HB1030012C	1.70	2.40	In	10	40	1.7
3 x 1-1/2	36HB1030014C	1.70	2.70	In	12	48	1.8
3 x 2	36HB1030020C	1.70	3.55	Out	6	24	2.3
3 x 2-1/2	36HB1030024C	1.70	3.90	Out	6	24	2.1
4 x 1-1/2	36HB1040014C	1.80	2.70	In	-	20	3.4
4 x 2	36HB1040020C	1.80	3.30	In	-	20	3.6
4 x 2-1/2	36HB1040024C	2.10	4.75	Out	-	20	3.9
4 x 3	36HB1040030C	2.10	4.75	Out	-	20	4.2

Bushings may have hexagon or octagon heads.



BRONZE

Fig. 36SS1 – Square Head Solid Plug

Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/8	36SS1001C	0.65	300	4800	0.02
1/4	36SS1002C	0.75	150	2400	0.03
3/8	36SS1003C	0.85	100	1600	0.06
1/2	36SS1004C	1.00	50	800	0.1
3/4	36SS1006C	1.15	30	360	0.1
1	36SS1010C	1.30	20	240	0.3
1-1/4	36SS1012C	1.40	40	160	0.6
1-1/2	36SS1014C	1.50	30	120	0.8
2	36SS1020C	1.60	20	80	1.2
2-1/2	36SS1024C	1.85	16	64	2.3
3	36SS1030C	1.95	16	32	4.0
4	36SS1040C	2.30	8	16	6.8






Fig. 36SC1 – Square Head Cored Plug

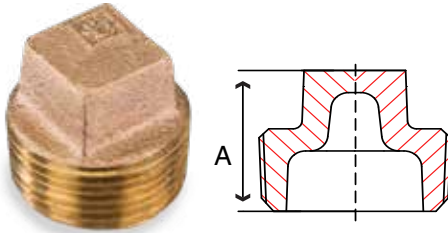


Size in	Part Number	A in	Packing		Weight lb
			Inner	Master	
1/2	36SC1004C	1.00	50	800	0.1
3/4	36SC1006C	1.15	30	360	0.1
1	36SC1010C	1.30	20	240	0.2
1-1/4	36SC1012C	1.40	40	160	0.3
1-1/2	36SC1014C	1.50	30	120	0.5
2	36SC1020C	1.60	20	80	0.7
2-1/2	36SC1024C	1.85	16	64	1.0
3	36SC1030C	1.95	16	32	2.0
4	36SC1040C	2.30	8	16	3.6

Fig. 36CS1 – Countersunk Square Plug

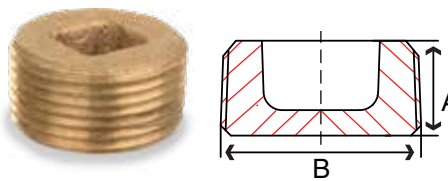

Size in	Part Number	A in	B in	Packing		Weight lb
				Inner	Master	
1/2	36CS1004C	0.54	0.38	50	800	0.05
3/4	36CS1006C	0.55	0.50	30	480	0.1
1	36CS1010C	0.69	0.50	20	320	0.2
1-1/4	36CS1012C	0.71	0.75	40	320	0.3
1-1/2	36CS1014C	0.73	0.75	30	240	0.5
2	36CS1020C	0.76	0.88	20	160	0.8
2-1/2	36CS1024C	1.07	1.12	16	64	1.2
3	36CS1030C	1.13	1.38	16	32	2.5
4	36CS1040C	1.22	2.00	8	16	3.7

Fig. 36FF1 – Floor Flange

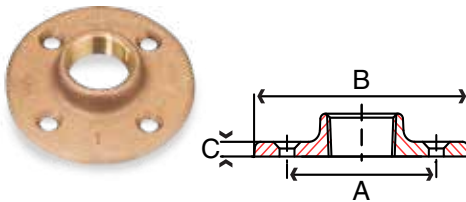

Size in	Part Number	A in	B in	C in	Packing		Weight lb
					Inner	Master	
1/4	36FF1002C	2.00	2.80	0.31	50	200	0.3
3/8	36FF1003C	2.00	2.80	0.31	50	200	0.3
1/2	36FF1004C	2.00	2.95	0.25	50	200	0.7
3/4	36FF1006C	2.45	3.35	0.30	30	120	0.8
1	36FF1010C	2.70	3.70	0.30	20	80	1.1
1-1/4	36FF1012C	3.00	3.95	0.30	15	60	1.1
1-1/2	36FF1014C	3.35	4.30	0.33	12	48	1.5
2	36FF1020C	4.25	5.60	0.33	8	32	2.4



SCI ProPak™ System

Fig. 16TH1 – Class 150 Threaded Flange

Size in	Part Number	Hole Size	Number of holes	A in	B in	C in	Packing	Weight lb
1/2	16TH1004	5/8	4	3.50	2.38	0.59	50	0.7
3/4	16TH1006	5/8	4	3.88	2.75	0.62	40	1.0
1	16TH1010	5/8	4	4.25	3.12	0.69	30	1.3
1-1/4	16TH1012	5/8	4	4.62	3.50	0.81	20	1.6
1-1/2	16TH1014	5/8	4	5.00	3.88	0.88	15	2.1
2	16TH1020	3/4	4	6.00	4.75	1.00	10	3.5
2-1/2	16TH1024	3/4	4	7.00	5.50	1.12	5	5.4
3	16TH1030	3/4	4	7.50	6.00	1.19	4	6.5
4	16TH1040	3/4	8	9.00	7.50	1.31	3	9.9
6	16TH1060	7/8	8	11.0	9.50	1.56	2	17.0


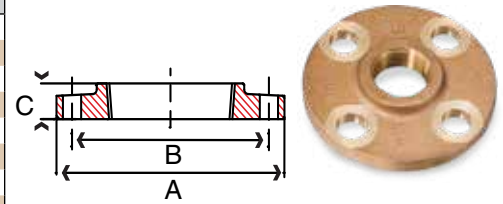


Fig. 16BL1 – Class 150 Blind Flange

Size in	Part Number	Hole Size	Number of holes	A in	B in	C in	Packing	Weight lb
3/4	16BL1006	5/8	4	3.88	2.75	0.62	30	1.0
1	16BL1010	5/8	4	4.25	3.12	0.69	25	1.7
1-1/4	16BL1012	5/8	4	4.62	3.50	0.81	20	2.5
1-1/2	16BL1014	5/8	4	5.00	3.88	0.88	15	3.0
2	16BL1020	3/4	4	6.00	4.75	1.00	10	5.5
2-1/2	16BL1024	3/4	4	7.00	5.50	1.12	8	8.5
3	16BL1030	3/4	4	7.50	6.00	1.19	5	10.5
4	16BL1040	3/4	8	9.00	7.50	1.31	3	16.5
6	16BL1060	7/8	8	11.0	9.50	1.56	2	32.5

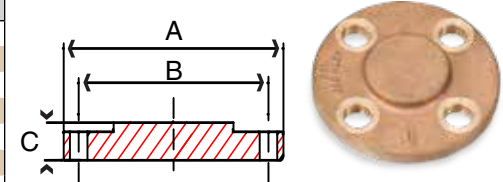

About ASC Engineered Solutions

ASC Engineered Solutions is defined by quality—in its products, services and support. With more than 1,400 employees, the company's portfolio of precision-engineered piping support, valves and connections provides products to more than 4,000 customers across industries, such as mechanical, industrial, fire protection, oil and gas, and commercial and residential construction. Its portfolio of leading brands includes ABZ Valve®, AFCON®, Anvil®, Anvil EPS, Anvil Services, Basic-PSA, Beck®, Catawissa, Cooplet®, FlexHead®, FPPI®, Gruvlok®, J.B. Smith, Merit®, North Alabama Pipe, Quadrant®, SCI®, Sharpe®, SlideLOK®, SPF® and SprinkFLEX®. With headquarters in Commerce, CA, and Exeter, NH, ASC also has ISO 9001:2015 certified production facilities in PA, TN, IL, TX, AL, LA, KS, and RI.



asc-es.com

Building connections that last™

