



PVC DWV CELLULAR CORE PIPE



DWV Cellular Core Pipe is more lightweight than solid-wall pipe, making it ideal for many drain, waste, and vent applications. It is manufactured in plain end or with one integral solvent-weld bell per length.

Specifications

- **Pipe Standard:** ASTM F891
- **Diameter Standard:** Iron Pipe Size (IPS)
- **Trade Sizes:** 1½", 2", 3", 4", and 6"
- **Overall Length:** 10 and 20 feet
- **Pipe Compound:** ASTM D4396, Cell Class 11432
- **Installation Standard:** ASTM F891
- **Color:** White
- **Certifications:** NSF 14



Scan to view
on [atkore.com](https://www.atkore.com)



Product Data

Trade Size	Part Number	Overall Length (ft)	Dimensions (in)				Approx. Weight per Foot (lbs)	Crate Quantity (ft)
			OD	ID	T	D		
PVC DWV SCH 40 Cell Plain End								
1.5	2415010P	10	1.900	1.60	0.145	--	0.38	1,800
1.5	2415020P	20	1.900	1.60	0.145	--	0.38	3,600
2	2420010P	10	2.375	2.05	0.154	--	0.48	1,050
2	2420020P	20	2.375	2.05	0.154	--	0.48	2,100
3	2430010P	10	3.500	3.05	0.216	--	0.99	750
3	2430020P	20	3.500	3.05	0.216	--	0.99	1,500
4	2440010P	10	4.500	4.00	0.237	--	1.3	570
4	2440020P	20	4.500	4.00	0.237	--	1.3	1,140
6	2460010P	10	6.625	6.04	0.280	--	2.5	260
6	2460020P	20	6.625	6.04	0.280	--	2.5	520
PVC DWV SCH 40 Cell Bell End								
3	2430010	10	3.500	3.05	0.216	4.0	0.99	750
3	2430020	20	3.500	3.05	0.216	4.0	0.99	1,500
4	2440010	10	4.500	4.00	0.237	5.0	1.3	570
4	2440020	20	4.500	4.00	0.237	5.0	1.3	1,140
6	2460010	10	6.625	6.04	0.280	6.5	2.5	260
6	2460020	20	6.625	6.04	0.280	6.5	2.5	520

Note: All dimensions are subject to normal manufacturing tolerances.

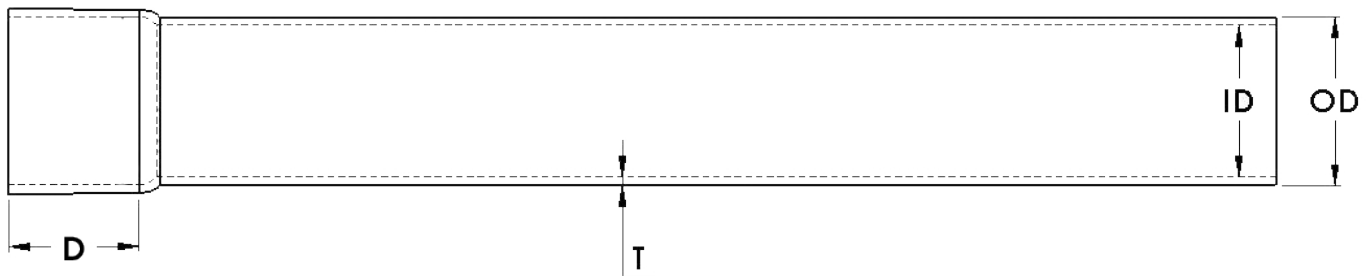


Illustration Legend

Code	Description
OD	Average OD (in)
ID	Approx. Internal Diameter (in)
D	Nominal Bell Depth (in)
T	Minimum Wall Thickness (in)

