

Lead-Free Brass Ball Valves



Diameters: 1/4" - 2"

DESIGN FEATURES:

- **Body:** Forged Lead-Free Brass
- **Port:** Full
- **Design:** Two Piece Body
- **Handle:** Locking Device
- **Ball:** Chrome Plated Lead-Free Brass 1/4" - 1"
304 Stainless Steel 1-1/4" - 2"
- **Seats:** PTFE
- **Stem:** Blow-Out Proof
- **1/4" - 2" Rated:** 600PSI Non-Shock WOG

APPLICABLE STANDARDS:

- Threaded Ends ANSI B1.20.1
- Conforms to MSS-SP-110
- CSA Gas Approved to 2" (IPS Only)
- NSF61 and ANSI 372 Approved

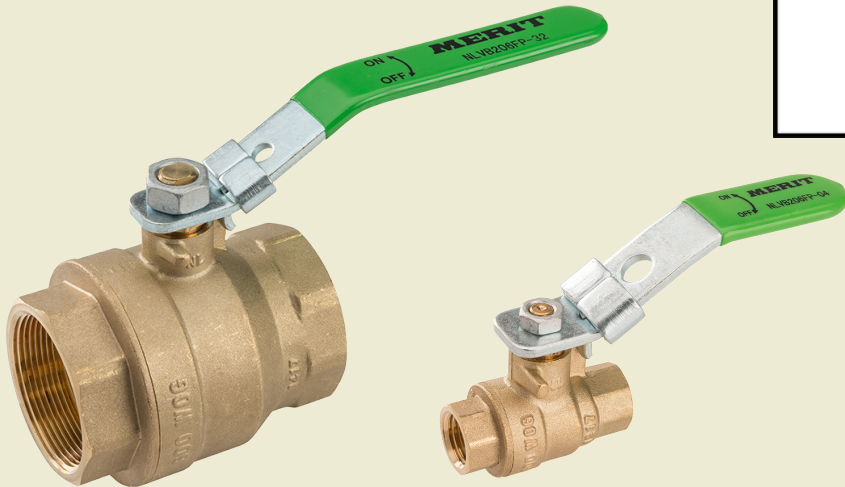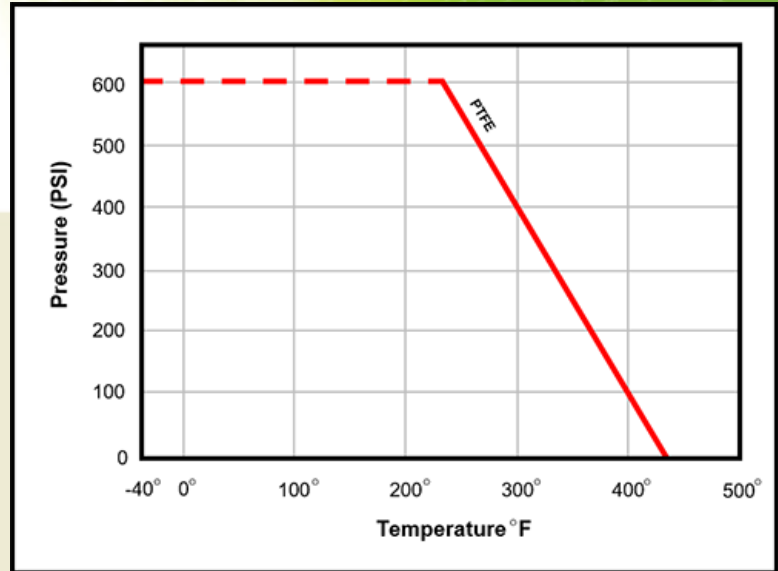

Conforms with lead content requirements for lead-free plumbing as defined by the U.S. Safe Drinking Water Act. Certified ≤ 0.25 weighted average % lead.

Cleveland Headquarters

One Merit Drive/PO Box 43127
Cleveland, OH 44143
TEL: 800.726.9800
FAX: 855.MBFAXIT (623.2948)
EMAIL: mbsales@meritbrass.com

Dallas Distribution Center

10614 King William Drive
Dallas, TX 75220
TEL: 877.259.2591
FAX: 877.259.2596
EMAIL: mbsalesTX@meritbrass.com







Birmingham Distribution Center

220 Oxmoor Court
Birmingham, AL 35209
TEL: 855.912.0409
FAX: 866.668.9168
EMAIL: mbsalesAL@meritbrass.com

Sparks Distribution Center

200 Vista Blvd., Suite #106
Sparks, NV 89434
TEL: 877.711.RENO (7366)
FAX: 877.376.0093
EMAIL: mbsalesNV@meritbrass.com



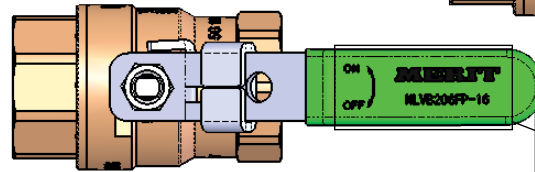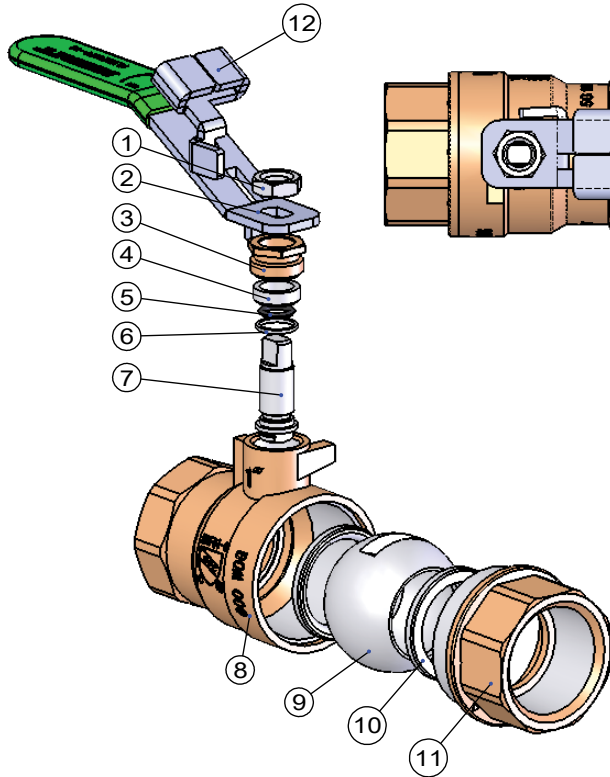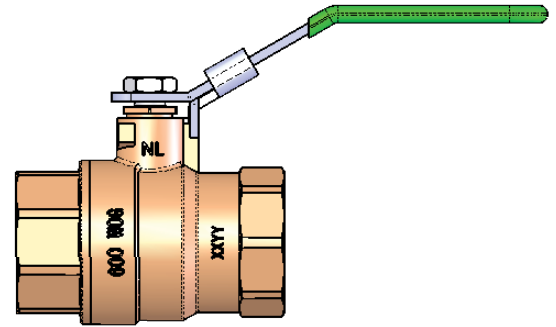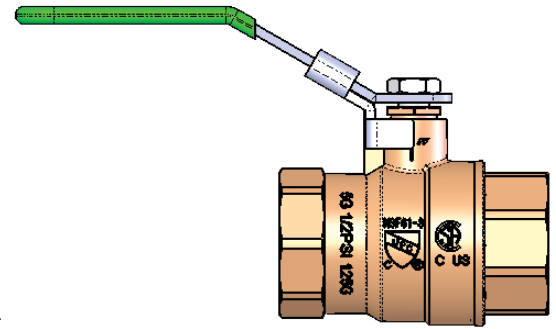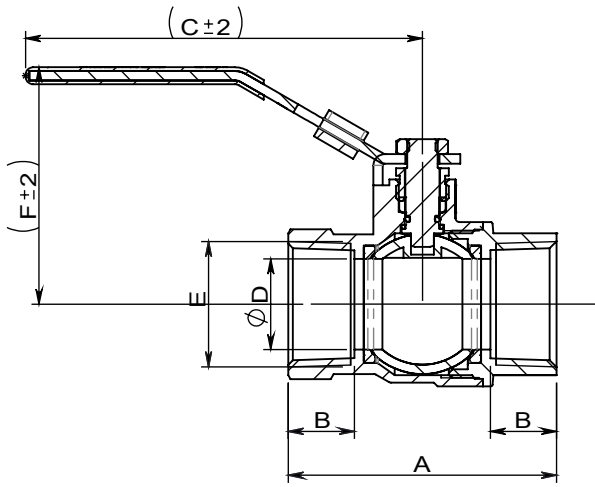

PART NO.

No.	Part	Material	QTY.
1	Hex-nut	Steel	1
2	Handle	Steel	1
3	Packing nut	Brass	1
4	Packing gland	PTFE	1
5	O-Ring	EPDM	1
6	Washer	PTFE	1
7	Stem	1/4"-1" : C46500 1-1/4"-2" : C36000	1
8	Body	C46500	1
9	Ball	1/4"-1" : C46500 1-1/4"-2" : AISI304	1
10	Seat	PTFE	2
11	Bonnet	C46500	1
12	Lock catch	Steel	1

Size	A(in)	B(in)	C(in)	D(in)	E	F(in)	Weight(lb)	PART NO.
1/4"	1.732	0.453	3.15	Ø 0.394	1/4-18NPT	1.843	0.26	NLVB206FP-04
3/8"	1.732	0.453	3.15	Ø 0.394	3/8-18NPT	1.843	0.26	NLVB206FP-06
1/2"	2.047	0.551	3.15	Ø 0.512	1/2-14NPT	1.937	0.37	NLVB206FP-08
3/4"	2.303	0.571	4.134	Ø 0.709	3/4-14NPT	2.291	0.55	NLVB206FP-12
1"	2.795	0.689	4.134	Ø 0.945	1-11.5NPT	2.469	0.88	NLVB206FP-16
1-1/4"	3.15	0.689	4.921	Ø 1.201	1 1/4-11.5NPT	3.039	1.36	NLVB206FP-20
1-1/2"	3.504	0.709	4.921	Ø 1.457	1 1/2-11.5NPT	3.217	1.88	NLVB206FP-24
2"	4.193	0.748	7.087	Ø 1.949	2-11.5NPT	3.72	3.44	NLVB206FP-32

Lead-Free Brass Ball Valves



Diameters: 2-1/2" - 4"

DESIGN FEATURES:

- **Body:** Forged Lead-Free Brass
- **Port:** Full
- **Design:** Two Piece Body
- **Handle:** Locking Device
- **Ball:** 304 Stainless Steel
- **Seats:** PTFE
- **Stem:** Blow-Out Proof
- **2-1/2" - 4" Rated:** 600PSI Non-Shock WOG
125PSI SWP

APPLICABLE STANDARDS:

- Threaded Ends ANSI B1.20.1
- Conforms to MSS-SP-110
- NSF61 and ANSI 372 Approved
- UL/FM Approved

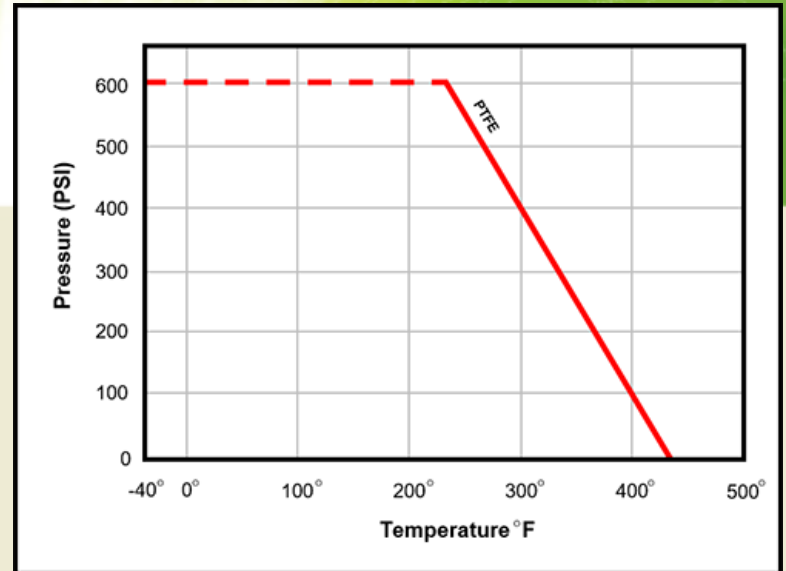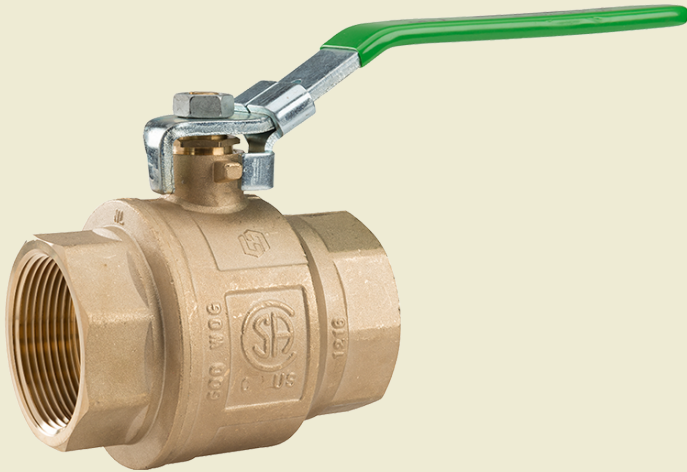

Conforms with lead content requirements for lead-free plumbing as defined by the U.S. Safe Drinking Water Act. Certified ≤ 0.25 weighted average % lead.

Cleveland Headquarters

One Merit Drive/PO Box 43127
Cleveland, OH 44143
TEL: 800.726.9800
FAX: 855.MBFAXIT (623.2948)
EMAIL: mbsales@meritbrass.com

Dallas Distribution Center

10614 King William Drive
Dallas, TX 75220
TEL: 877.259.2591
FAX: 877.259.2596
EMAIL: mbsalesTX@meritbrass.com





Birmingham Distribution Center

220 Oxmoor Court
Birmingham, AL 35209
TEL: 855.912.0409
FAX: 866.668.9168
EMAIL: mbsalesAL@meritbrass.com

Sparks Distribution Center

200 Vista Blvd., Suite #106
Sparks, NV 89434
TEL: 877.711.RENO (7366)
FAX: 877.376.0093
EMAIL: mbsalesNV@meritbrass.com



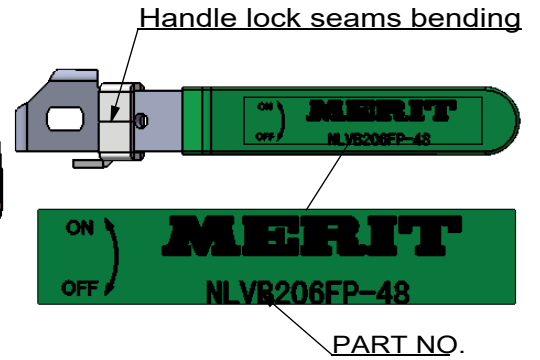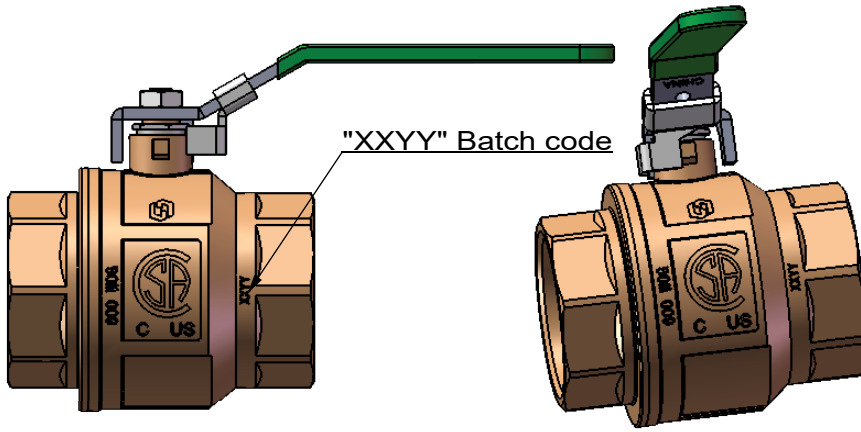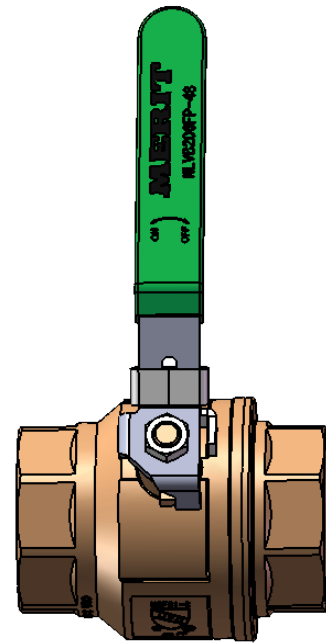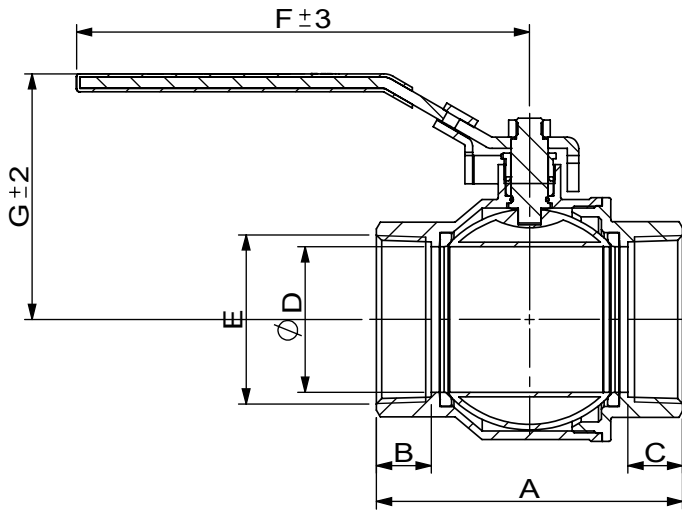


POSITION OF "OPEN"

POSITION OF "CLOSE"



PART NO.

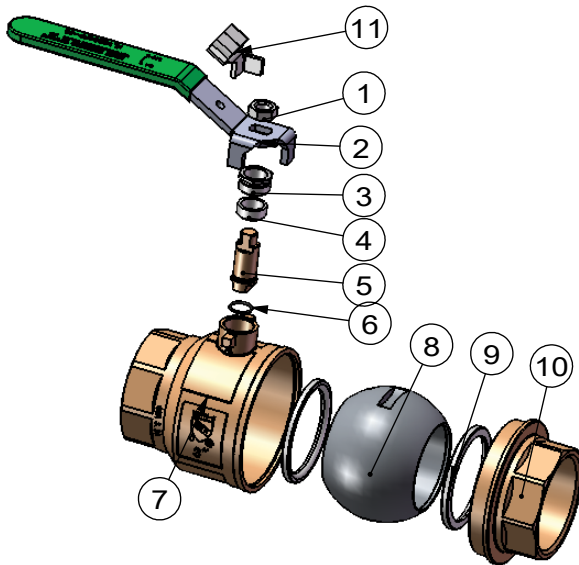

No.	Part	Material	Qty.
1	Hex-nut	Steel	1
2	Handle	Steel	1
3	Packing nut	Brass	1
4	Packing gland	PTFE	1
5	Stem	C3600	1
6	O-ring	EPDM	1
7	Body	C46500	1
8	Ball	Stainless Steel	1
9	Seat	PTFE	1
10	Bonnet	C46500	1
11	Lock catch	Steel	1

Size	A(in)	B(in)	C(in)	D(in)	E	F(in)	G(in)	Weight(lb)	PART NO.
2-1/2"	5.551	1.063	1.063	∅ 2.5	2 1/2-8NPT	9.449	4.744	7.32	NLVB206FP-40
3"	6.378	1.142	1.142	∅ 3.031	3-8NPT	9.449	5.118	10.11	NLVB206FP-48
4"	7.543	1.201	1.201	∅ 3.937	4-8NPT	9.449	5.866	16.91	NLVB206FP-64