




Caps
EXTRA HEAVY
Inches / Pounds

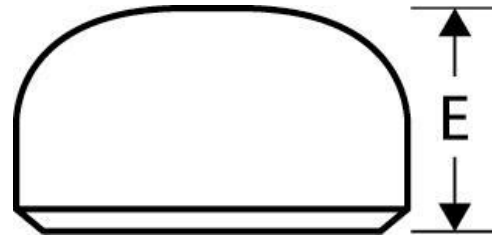

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.546	0.147	1.00	XH/80	0.1
3/4	1.050	0.742	0.154	1.25	XH/80	0.16
1	1.315	0.957	0.179	1.50	XH/80	0.28
1 1/4	1.660	1.278	0.191	1.50	XH/80	0.48
1 1/2	1.900	1.500	0.200	1.50	XH/80	0.67
2	2.375	1.939	0.218	1.50	XH/80	0.92
2 1/2	2.875	2.323	0.276	1.50	XH/80	1.3
3	3.500	2.900	0.300	2.00	XH/80	2.1
3 1/2	4.000	3.364	0.318	2.50	XH/80	3
4	4.500	3.826	0.337	2.50	XH/80	3.5
5	5.563	4.813	0.375	3.00	XH/80	5.8
6	6.625	5.761	0.432	3.50	XH/80	9.3
8	8.625	7.625	0.500	4.00	XH/80	16
10	10.75	9.750	0.500	5.00	XH/60	26
12	12.75	11.75	0.500	6.00	XH*	38
14	14.00	13.00	0.500	6.50	XH*	47
16	16.00	15.00	0.500	7.00	XH/40	57
18	18.00	17.00	0.500	8.00	XH*	78
20	20.00	19.00	0.500	9.00	XH/30	100
22	22.00	21.00	0.500	10.00	XH*	115
24	24.00	23.00	0.500	10.50	XH*	145
26	26.00	25.00	0.500	10.50	XH*	175
30	30.00	29.00	0.500	10.50	XH/20	634
34	34.00	33.00	0.500	10.50	XH/20	210
36	36.00	35.00	0.500	10.50	XH/20	913
42	42.00	41.00	0.500	12.00	XH*	1,300
48	48.00	47.00	0.500	13.50	XH*	1,675

** XH* designates Extra Strong (extra strong wall). This size and thickness do not correspond to any pipe schedule number.*

** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.*