




Straight Tees
EXTRA HEAVY
Inches / Pounds

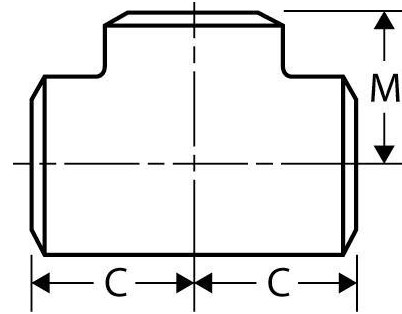

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center To End (C)	Center To End (M)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.840	0.546	0.147	1.00	1.00	XH/80	0.37
3/4	1.050	0.742	0.154	1.12	1.12	XH/80	0.58
1	1.315	0.957	0.179	1.50	1.50	XH/80	0.87
1 1/4	1.660	1.278	0.191	1.88	1.88	XH/80	1.6
1 1/2	1.900	1.500	0.200	2.25	2.25	XH/80	2.3
2	2.375	1.939	0.218	2.50	2.50	XH/80	3.9
2 1/2	2.875	2.323	0.276	3.00	3.00	XH/80	6.5
3	3.500	2.900	0.300	3.38	3.38	XH/80	9
3 1/2	4.000	3.364	0.318	3.75	3.75	XH/80	12.2
4	4.500	3.826	0.337	4.12	4.12	XH/80	16.2
5	5.563	4.813	0.375	4.88	4.88	XH/80	26.6
6	6.625	5.761	0.432	5.62	5.62	XH/80	41.8
8	8.625	7.625	0.500	7.00	7.00	XH/80	76.2
10	10.75	9.750	0.500	8.50	8.50	XH/60	115
12	12.75	11.75	0.500	10.00	10.00	XH*	169
14	14.00	13.00	0.500	11.00	11.00	XH*	237
16	16.00	15.00	0.500	12.00	12.00	XH/40	284
18	18.00	17.00	0.500	13.50	13.50	XH*	353
20	20.00	19.00	0.500	15.00	15.00	XH/30	442
22	22.00	21.00	0.500	16.50	16.50	XH*	586
24	24.00	23.00	0.500	17.00	17.00	XH*	625
26	26.00	25.00	0.500	19.50	19.50	XH*	794
30	30.00	29.00	0.500	22.00	22.00	XH/20	1,065
34	34.00	33.00	0.500	25.00	25.00	XH/20	1,420
36	36.00	35.00	0.500	26.50	26.50	XH/20	1,610
42	42.00	41.00	0.500	30.00	28.00	XH*	1,788
48	48.00	47.00	0.500	35.00	33.00	XH*	2,300

*** XH* designates Extra Strong (extra strong wall). This size and thickness do not correspond to any pipe schedule number.**

*** Dimensions conform to ASME B16.9 & material conforms to ASTM SA-234 Grade B.**