




SERVICE METAL
Trust In Every Connection

MASTER DISTRIBUTOR OF
PIPE FITTINGS & VALVES

Caps
SCHEDULE 10S
Inches / Pounds

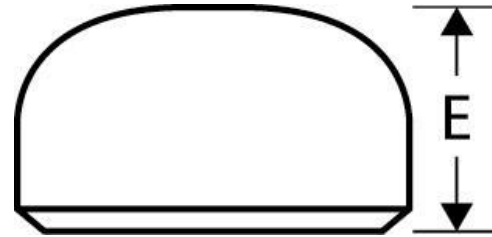

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Length (E)	Pipe Schedule	Approximate Weight (in Pounds)
1/2	0.84	0.622	0.083	1.00	10S	0.07
3/4	1.05	0.824	0.083	1.25	10S	0.09
1	1.32	1.049	0.109	1.50	10S	0.09
1 1/4	1.66	1.380	0.109	1.50	10S	0.23
1 1/2	1.90	1.610	0.109	1.50	10S	0.28
2	2.38	2.067	0.109	1.50	10S	0.40
2 1/2	2.88	2.469	0.120	1.50	10S	0.24
3	3.50	3.068	0.120	2.00	10S	0.82
4	4.50	4.026	0.120	2.50	10S	1.35
5	5.56	5.047	0.134	3.00	10S	2.34
6	6.62	6.065	0.134	3.50	10S	3.18
8	8.62	7.981	0.148	4.00	10S	6.35
10	10.75	10.020	0.165	5.00	10S	21.9
12	12.75	12.000	0.180	6.00	10S	31.7
14	14.00	13.250	0.188	6.50	10S	21.9
16	16.00	15.250	0.188	7.00	10S	26.1
18	18.00	17.250	0.188	8.00	10S	34.2
20	20.00	19.250	0.218	9.00	10S	45.4
24	24.00	23.250	0.250	10.50	10S	59.7

** Dimensions conform to ASME B16.9*

Material Specification ASTM SA/A 403 Grades WP304/304L-W and WP316/316L-W