




Short Radius 90° Elbows
SCHEDULE 40S
Inches / Pounds

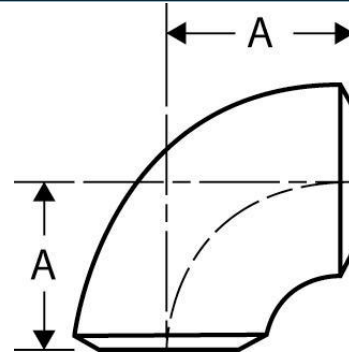

Nominal Pipe Size	Outside Diameter	Inside Diameter	Wall Thickness	Center to End (A)	Pipe Schedule	Approximate Weight (in Pounds)
1	1.32	1.05	0.133	1.00	40S	0.25
1 ¼	1.66	1.38	0.140	1.25	40S	0.39
1 ½	1.90	1.61	0.145	1.50	40S	0.53
2	2.38	2.07	0.154	2.00	40S	0.97
2 ½	2.88	2.47	0.203	2.50	40S	2
3	3.50	3.07	0.216	3.00	40S	3
3 ½	4.00	3.55	0.226	3.50	40S	4.3
4	4.50	4.03	0.237	4.00	40S	6.1
5	5.56	5.05	0.258	5.00	40S	9.7
6	6.63	6.07	0.280	6.00	40S	16.7
8	8.63	7.98	0.322	8.00	40S	32.4
10	10.75	10.02	0.365	10.00	40S	56.3
12	12.75	12.00	0.375	12.00	40S	79.4
14	14.00	13.25	0.375	14.00	40S	104
16	16.00	15.25	0.375	16.00	40S	129
18	18.00	17.25	0.375	18.00	40S	163
20	20.00	19.25	0.375	20.00	40S	210
24	24.00	23.25	0.375	24.00	40S	297

** Dimensions conform to ASME B16.9*

Material Specification ASTM SA/A 403 Grades WP304/304L-W and WP316/316L-W